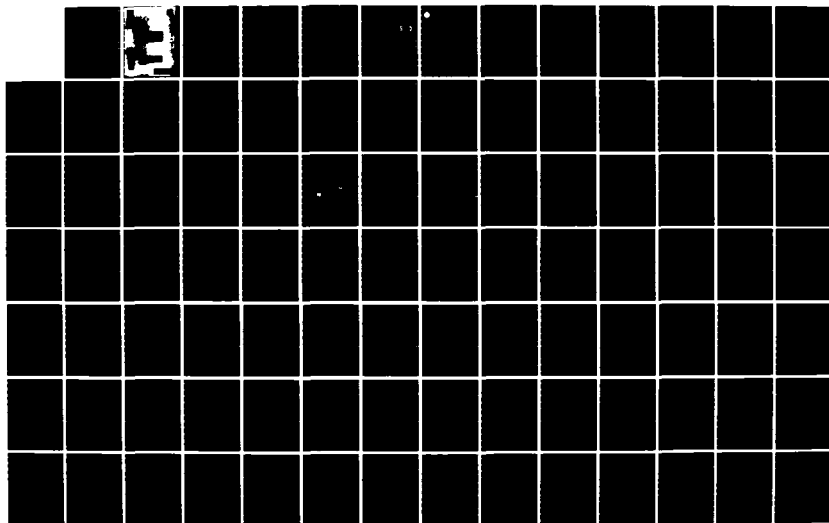AD-A166 718   ECONOMIC COMPARISON OF A HIGH PRESSURE CRYSTALLIZATION   1/1.
              PROCESS WITH A DISTILLATION PROCESS(U) ARMY MILITARY
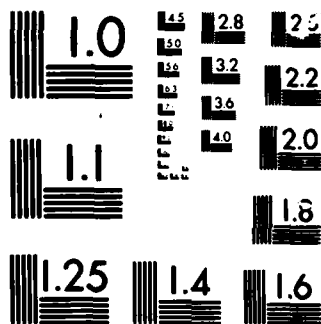   PERSONNEL CENTER ALEXANDRIA VA J E DIETZ 07 JAN 86

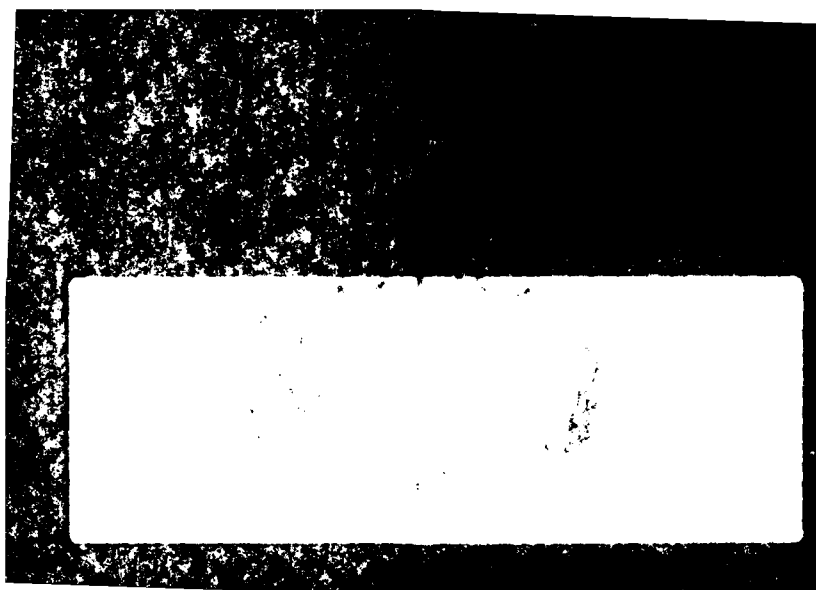UNCLASSIFIED   F/G 7/1   NL

ECONOMIC COMPARISON OF A
HIGH PRESSURE CRYSTALLIZATION PROCESS
WITH A DISTILLATION PROCESS

2LT James Eric Dietz
HQDA, MILPERCEN (DAPC-OPA-E)
200 Stovall Street
Alexandria, VA 22332

Thesis, 7 January 1986

Submitted to
Rose-Hulman Institute of Technology, Terre Haute, IN
In partial fulfillment of the requirements for the degree
of Master of Science in Chemical Engineering

REPORT DOCUMENTATION PAGE	READ INSTRUCTIONS BEFORE COMPLETING FORM

1. REPORT NUMBER	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
	AD-A166719	

4. TITLE (and Subtitle)	5. TYPE OF REPORT & PERIOD COVERED
Economic Comparison of a High Pressure Crystallization Process with a Distillation Process	Thesis, 7JAN86
	6. PERFORMING ORG. REPORT NUMBER

7. AUTHOR(s)	8. CONTRACT OR GRANT NUMBER(s)
James Eric Dietz	

9. PERFORMING ORGANIZATION NAME AND ADDRESS	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
Student HQDA, MILPERCEN(DAPC-OPA-E) 200 Stoval Street Alexandria, Virginia 22332	

11. CONTROLLING OFFICE NAME AND ADDRESS	12. REPORT DATE
HQDA, MILPERCEN(DAPC-OPA-E) 200 Stovall Street Alexandria, Virginiaa 22332	7 JAN 86
	13. NUMBER OF PAGES
	86

14. MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)	15. SECURITY CLASS. (of this report)
	Distr. A
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for public release; distribution unlimited

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

High pressure crystallization, Crystallization, High Pressure, Benzene

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

A process capable of a 99+% purity was desired. There exists distillation technology capable of this separation. But, the heat added and removed in a distillation process is very high for a high purity operation and is very expensive. A more energy efficient process is desired by using a high pressure crystallization process. Crystallization of many systems may result in a complete separation and at theoretical yields. There were two designs examined for high pressure crystallization. The designs differed in the pressurization of a batch charge. The first was pressurized

DD FORM 1473 EDITION OF 1 NOV 65 IS OBSOLETE

by an inert gas. The gas was compressed and fed to the charged crystallizer. The second was hydraulically pressurized. This crystallizer was a double sided piston and cylinder arrangement. The low pressure end had a large area and the high pressure end had a smaller area. The pressure difference being therratio of the areas. It was found that the hydraulic process was least costly, $171,300, to build and operateo on a 10 year basis. The gas pressurization was next at $ 180,795. The distillation process, as expected , was most costly at $ 196,200. The gas pressurization process may have more premise to further reduce operating costs. The inert gas could be replaced with air and a diaphragm could be used to separate it from the liquid charge. This would result in a savings of $ 6,600 in capital expense. The gas pressurization process is also the process on which a patent would most probably be obtained.

ECONOMIC COMPARISON

OF A HIGH PRESSURE CRYSTALLIZATION PROCESS

WITH A DISTILLATION PROCESS

A Thesis

Submitted to the Faculty

of

Rose-Hulman Institute of Technology

by

James Eric Dietz

In Partial Fulfillment of the

Requirements for the Degree

of

Master of Science in Chemical Engineering

January 1986

86 4 7 058

ROSE-HULMAN INSTITUTE OF TECHNOLOGY
Graduate Council

APPOINTMENT OF FINAL EXAMINATION COMMITTEE
AND
FINAL EXAMINATION REPORT

Student ....J. Eric Dietz.. Degree ......M.S.................

Department ....Chemical Engineering........................... Date ....1/22/86...........

☒ Thesis   Title ...Economic Comparison of a High Pressure Crystallization............
                         Process With a Distillation Process

☐ Non-Thesis

I. EXAMINATION COMMITTEE

It is requested that the following committee be appointed to conduct the final examination of the student named above.

Professor		Department
Dr. Warren W. Bowden,	Chairman	Chemical Engineering
Dr. Jerry A. Caskey		Chemical Engineering
Dr. Stuart Leipziger		Chemical Engineering
Dr. Dennis Lewis		Chemistry

Requested by ...Dr. Warren W. Bowden............... Approved by _Sam C. White_...........
         Major Professor   Dept. Chairman

II. FINAL EXAMINATION REPORT

☒ Passed with recommendation for doctoral study

☐ Passed

☐ Failed

Date of Exam ....January 7, 1986.................. Committee _Warren W. Bowden_ Chm.
                                           Signatures

APPROVED — RHIT GRADUATE COUNCIL (stamp)

Note: When the report is complete, the Chairman of the Examining Committee should send this form to the Director of Graduate Studies. Copies will be returned to the Chairman of the Advisory Committee, Department Chairman, and student.

ABSTRACT

Dietz, James Eric
M.S. in Chemical Engineering
Rose-Hulman Institute of Technology
January 1986
Economic Comparison of a High Pressure Crystallization
Process with a Distillation Process
Dr. W. W. Bowden

A process capable of a 99+% purity was desired.
There exists distillation technology capable of this
separation. But, the heat added and removed in a
distillation process is very high for a high purity
operation and is very expensive. A more energy efficient
process is desired by using a high pressure crystallization
process. Crystallization of many systems may result in a
complete separation and at theoretical yields. There were
two designs examined for high pressure crystallization. The
designs differed in the pressurization of a batch charge.
The first was pressurized by an inert gas. The gas was
compressed and fed to the charged crystallizer. The second
was hydraulically pressurized. This crystallizer was a
double sided piston and cylinder arrangement. The low
pressure end had a large piston area and the high pressure
end had a smaller area. The pressure difference being the

ratio of the areas. It was found that the hydraulic was least costly, $ 171,300, to build and operate on a 10 year basis. The gas pressurized process was next at $ 180,795. The distillation process, as expected, was most costly at $ 196,200. The gas pressurized process may have more promise to further reduce operating costs. The inert gas could be replaced with air and a diaphragm could be used to separate it for the liquid charge. This would result in an annual savings of $ 4,540 and a savings of $ 6,600 in capital expense. The gas pressurization process is also the process on which a patent would most probably be obtained.

iii

TABLE OF CONTENTS

List of Figures

vii

List of Tables

Nomenclature

A	— surface area of heat exchanger
A_1	— surface area of piston 1
A_2	— surface area of piston 2
a	— axis of ellipsoid
b	— axis of ellipsoid
C_o	— feed composition
C_s	— solid composition
C_w	— waste composition
c	— axis of ellipsoid
D	— diameter
d	— distillate flow rate
E	— joint efficiency
e	— eutectic point
F	— feed flow rate
H	— enthalpy
k	— separation factor
L_{actual}	— actual reflux
L_{min}	— minimum reflux
L_{SH}	— length of shell
l	— liquid waste flow rate
n	— moles
P	— pressure

P_1	– pure component transition pressure of component 1
P_2	– pure component transition pressure of component 2
P_e	– pressure corresponding to the eutectic point, e
Q	– heat flow rate
Q_H	– heat flow rate for high temperature system
Q_L	– heat flow rate for low temperature system
q	– flow rate of gas stream
r	– radius
R	– gas constant
S	– maximum allowable pressure
s	– product flow rate
T_C	– condenser temperature
T_H	– high temperature
T_o	– ambient temperature
T_L	– low temperature
T_R	– reboiler temperature
t	– thickness of pressure vessel
t	– time
U	– internal energy
V	– volume
v	– specific volume
V_{BZ}	– specific volume of benzene at P
V_{CH}	– specific volume of cyclohexane at P
V_E	– volume of ellipsoid
V_H	– volume of steel in head

V_o – specific volume at 1 atm

$V_{o\ BZ}$ – specific volume of benzene at 1 atm

$V_{o\ CH}$ – specific volume of cyclohexane at 1 atm

V_{SH} – volume of steel in shell

W_n – net work

X_c – feed composition

X_d – distillate composition

X_e – eutectic composition

X_f – feed composition

X_1 – waste composition

X_{N2} – solubility of nitrogen

X_s – product composition

z – compressibility factor

z – pressure adjustment in ASME design equation

$\propto$ – relative volatility

λ – latent heat of vaporization

I. <u>Introduction</u>

Crystallization is the formation of solids from solutions or melts. This process may be accomplished in three methods. The first involves separation through a vapor-solid equilibrium. Generally, this involves a solid which is slightly soluble in the gas phase, for example, iodine crystals. The crystals sublime and reform on some new site. This has been called fractional sublimation. Second is a solid-liquid equilibrium process. Commonly, a solid can be purified by dissolving it in a liquid with which it is slightly soluble at room temperature and very soluble at some higher temperature. It is assumed that the impurity present in small quantities is not favored to deposit in the recystallization. This is called recrystallization or solvent recrystallization. The third method is called fractional solidification or melt crystallization. This method works best and is usually used with concentrated systems with an objective of very high purity. The last method is of interest due high recovery and absence of solvent, another contaminant. In the melt, the substance itself acts as the solvent, eliminating the need of a solvent.[28] Melt crystallization usually has the advantage of lower operating costs.

Melt crystallization is not a recent discovery. It

was first used during the nineteenth century by whalers. They found that potable water could be obtained from sea ice or icebergs if melted properly.[36] Also by 1918 crude paraffin waxes were separated from petroleum oils exclusively by crystallization. These waxes were further refined by freezing the wax in sheets and placing them over heating coils. Slow melting proceeded, resulting first in the appearance of oil beads which were allowed to run off leaving an even more pure product.[29] The first industrial crystallizer, the Proabd refiner, was developed in 1960. This batch process slowly cooled a charge until solid and then slowly reheated it. The impurities melt and drain first and leave a progressively more pure product.[20] This work will proceed further than the Proabd refiner. It uses high pressure, rather than temperature, as a driving force. The high pressure process will be less costly, while achieving higher purity than a distillation process in use today.

II. Objectives

The stream to be refined has a composition of 90% benzene and a desired product composition of 99+% benzene.

1. Design two high pressure crystallization processes, gas pressurization and hydraulic pressurization, capable of the desired separation.

2. Design a distillation process capable of the desired separation.

3. Compare the three designs on capital investment and on utility costs.

4. Write a Flowtran compatible program to design the crystallizer with gas pressurization.

III. Literature Summary

Crystallization

For discussion of crystallization, there must be several preliminary topics discussed. First nucleation must be discussed to understand the formation of crystals. Next phase diagrams of solid-liquid systems must be understood. Also, for design of a new process, the existing processes must be reviewed. Finally, the energy requirement of each processes must be determined.

Nucleation

Whatever the driving force present, nucleation proceeds in three fundamental steps. The first step demands that the solution obtain some degree of supersaturation or subcooling. Supersaturation is cooling beyond the normal melting point of the system. Supersaturation is not sufficient cause for the development of crystals. Microscopic seeds or nuclei must be present for each successive molecule to deposit. These seeds may be small crystals or any kind of

microscopic debris or dust. The third step is the growth
of the crystal around the developed centers. Figure 1
will help explain some other terms describing
crystallization.[28]

NUCLEATION

PRIMARY   SECONDARY
                          (crystal induced,

HOMOGENEOUS   HETEROGENEOUS
(spontaneous)
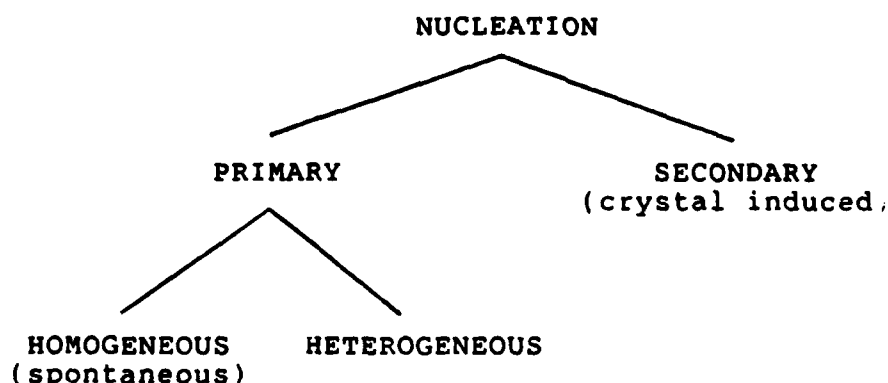
Figure 1. Hierarchy of Crystallization Terms

Most crystals are formed around some sort of dust or
debris, heterogeneous nucleation. *Most reported cases of
spontaneous crystallization are in fact seeded in some
manner such as by atmosphereic dust.* Normal aqueous
solutions contain $10^6 - 10^8$ particles per cubic
centimeter.[28] Industrially, crystallization is carried
out through heterogeneous or secondary nucleation.
Deliberate seeding gives some control over product size
and distribution. The rainmaking silver iodide is an
example. It has the ability to crystallize water in the
atmosphere due to the similarity of the AgI crystal
lattice and that of H_2O. Many factors are involved in
the ability of a material to seed crystals. Lattice

similarity may or may not contribute to the
crystallization process.[28]

Phase Diagrams

Knowledge of phase diagrams is required to
understand the operation of a crystallizer. The phase
diagram is the equilibrium relationship at specified
concentration and one other extensive variable (pressure
or temperature). This work focuses on the pressure
variation.

For discussion, an example of a binary system with
eutectic and continuous solid solution will be examined
in Figure 2. P_1 and P_2 are pressures corresponding to
pure component transition pressures. At these points the
liquid, mother liquor, and solid of these pure components
are at equilibrium. The point, e, at the intersection of
the two curves is called the eutectic point. The two
curves go through e due to the effect of subcooling. The
pressure increase or supersaturation is required to form
crystals. The pressure corresponding to this point is
labeled P_e. The solid and liquid at this pressure, P_e,
are of the same composition, X_e.
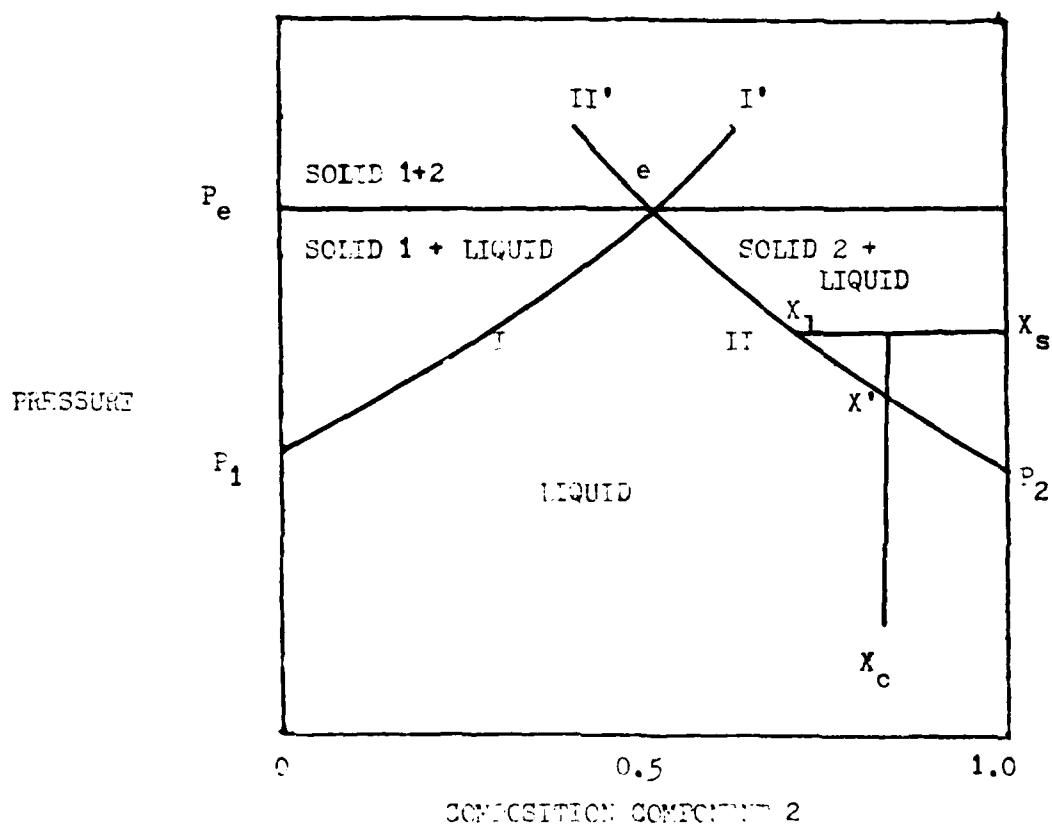
Figure 2. Example of binary system with eutectic
and continuous solid solution

Now that the basic points of interest on the phase
diagram have been examined, further discussion may
proceed on the usefulness of phase diagrams. Assuming a
solution of composition X_c, the pressure can be increased
to P_c where the first solid component 2 should begin to
form. As the amount of solid grows, the concentration of
component 1 grows in the mother liquor. At any desired
separation, there are two phase concentrations.[37]

Figure 2 can be used to find the relative
quantities of solid and liquid using mass balances. This
known as the lever rule, involves measuring certain
lengths on the graph.

Mass balances

$$\text{Overall:} \quad F = l + s \qquad (1)$$

$$\text{Component 2:} \quad F \cdot X_c = l \cdot X_1 + s \cdot X_s \qquad (2)$$

$$F \cdot X_c = l \cdot X_c + (F-l) X_c \qquad (3)$$

$$1/F = \frac{X_c - X_s}{X_1 - X_s} \qquad (4)$$

$$1/F = \frac{\text{distance between } X_c \text{ and } X_s}{\text{distance between } X_1 \text{ and } X_s} \qquad (5)$$

Also:

$$s/F = \frac{\text{distance between } X_1 \text{ and } X_c}{\text{distance between } X_1 \text{ and } X_s} \qquad (6)$$

Binary mixtures to some degree do not crystallize
out in pure form. Due to an inconsistent crystal

lattice, some impurity may be introduced. The result can be a solid solution. Some are completely miscible but others may have very small solubilities.

There are other relationships in addition those shown on Figure 2 which also must be understood to discuss high pressure crystallization. The first of these is the relationship between pressure and volume decrease under isothermal conditions, Figure 3.

Curve A represents the phase change for the pure liquid material. Crystallization proceeds by compression at constant pressure, A_1 to A_2, beyond A, all material is solid and compression of the solid phase again marks a rise in pressure. The curve B represents the impure material. The difference between A_1 and B_1 is the transition pressure elevation. Like the freezing temperature depression, the pressure difference is a function of the amount of impurity.
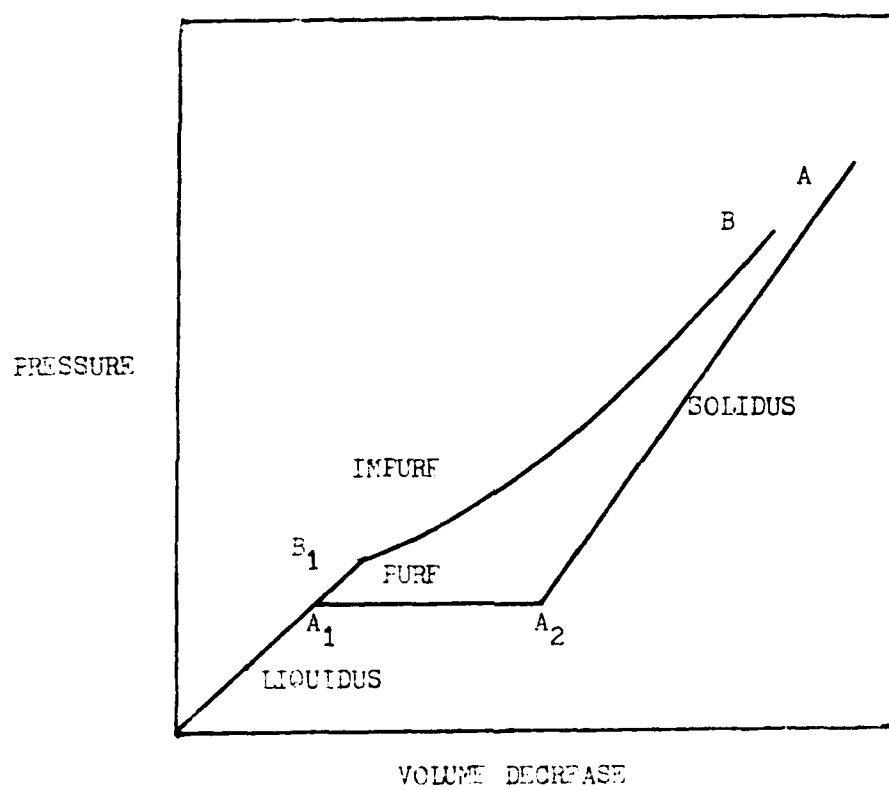
Figure 3. Phase change under pressure of pure (A) an impure (B)

Figure 4 is an example of this for the benzene-cyclohexane system. It is pressure versus fraction of solid, but it is about the same as pressure and volume decrease between A_1 and A_2. The curve A is 99.5% benzene. The curve B is 100% benzene. Clearly, curve A shows the transition pressure elevation phenomenon.
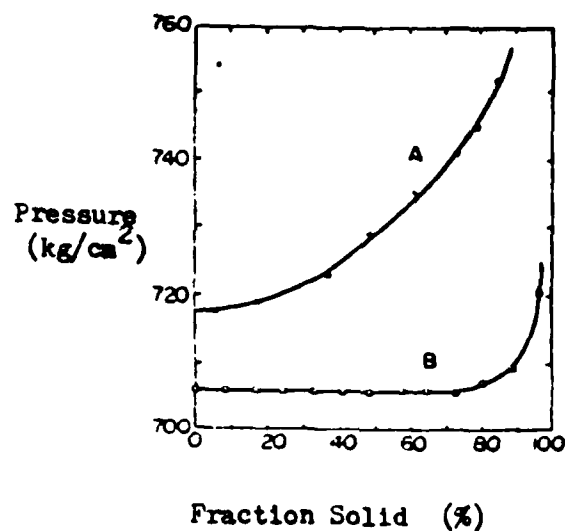
Figure 4. Transition pressure of pure (B) and impure (A) benzene vs. fraction solid [22]

Common Processes

There are two methods to apply the driving force to a crystallization process. The first and perhaps most obvious is to remove heat to drop the temperature. This is the more obvious due to the frequency of occurrence. In most areas ice is a common winter sight. The second driving force is to increase the pressure. It should be known that the freezing point of most liquids increases with the addition of pressure. It should also be realized that the liquid will freeze with the addition of enough pressure.

Common Temperature Processes

With an understanding of phase diagrams, some of the common crystallization processes may be discussed. The first and the simplest is normal freezing. This process slowly freezes the impure mixture to a well defined interface. Freezing proceeds until the desired amount of product is frozen and the remaining mother liquor is discarded. This process is also known as progressive freezing. To identify a progressive freezing process, an interface perpendicular to the longest dimension of the crystallizer will be found.

Gouw[13] attempted to optimize batch normal freezing by using programmed temperature with time. His study found that impurity deposit was not affected early in the freezing cycle. However, late in the cycle, the impurities in the deposited solid could be minimized with the programmed temperature approach. Normal freezing has been used to purify continuous solid solutions.

Fractional melting is another method. It uses slow freezing followed by slow melting. In this process the impurity freezes last and melts first. The impurity remains in concentrated pockets in the melt. The pockets drain to leave a progressively purer solid behind. Glassgow and Ross[12] cite some considerations for use of a fractional melting process. First, the system should segregate simply by cooling. No solid solutions are formed. Second, the system mass should be slowly cooled and reheated close to equilibrium conditions, avoiding any inclusion of the impurity. They recommend use of a closed system to avoid problems involved with handling of toxic, odorous or unstable compounds. They also recommend an adequate driving-force to remove the mother liquor adhering to the crystals. Desirable systems would produce large crystals and have a mother liquor of low viscosity. Aston and Mastrangelo[3], also recognizing these factors, used compressible vanes to squeeze the mother liquor from the crystals and in doing so, reduced the equilibrium time.

The first industrial crystallizer, the Proabd refiner, was originally used to purify napthene. Economics of an industrial process are very important and equilibrium is traded for productivity. The separation factor obtained, K, will be less than that which could be achieved by equilibrium. For supervision and labor requirements to be minimized, the process is operated in long cycles which vary from 24 - 48 hours. Half of this time is used for cooling, the remaining half for warming, draining and refilling. The crystallizer is a large container with a heat exchange network capable of uniform heat transfer. The flow rate of the heat exchange medium is kept high to maintain a small temperature difference, .5° C, and uniform conditions.[20]

The product liquid, when drained, will be of varying composition. Many fractions could be removed, however, for practical considerations only three are removed. The mother liquor is the first removed and is later discarded or recycled to a unit process before the crystallizer. The second is a crystallizer recycle, usually of purity equal to, or greater than that of the feed. The final fraction is the pure product fraction.[20]

Common Pressure Processes

It is obvious that heat transfer problems must be

solved to operate the Proabd refiner, however, this paper is concerned with the pressure driven, adiabatic, crystallization process. There are two methods to be considered to carry out the crystallization. The first is a gas pressurized process. The idea with this method is to use the gas to apply the work and crystallize the liquid. This is desirable due to the low cost of the crystallizer. There would be no working parts or piston. The use of a reciprocating compressor would introduce more cost but perhaps less than the large piston of the second process. There is no known process which is operated in this manner. The second method is hydraulic. A large piston at low pressure drives a smaller piston in the crystallizer. Working in this manner, M. Moritoki and co-workers have developed a pilot plant capable of producing industrial quantities.[25] Their process is adiabatically pressurized which is accompanied by a temperature rise. This Kobe Steel group found that the initial state and increase in pressure would determine the temperature, solid fraction and mother liquor concentration. Figure 5 is a diagram of the process.[18]

This process operates in five steps. Figure 6 is a pressure-temperature diagram of operation of the process. First, A, the piston is raised to introduce the feed followed by the second step, B - C, the adiabatic pressurization. Third, C - D, the liquor is removed by filtering through a mesh. The fourth step, D - E, is the

compaction and sweating of the crystals still under pressure. This step reduces the pressure to allow the crystals to melt and wash the liquor from the surfaces. Finally, the compressed, washed cake is removed if solid or drained if liquid.[18]

Oil hydraulic unit

原料タンク	予備冷却装置	ポンプ	圧力晶析装置	圧力調整弁	排液タンク
Feed tank	Chiller	Pump	High pressure crystallizer	Pressure regulator	Removed liquor tank
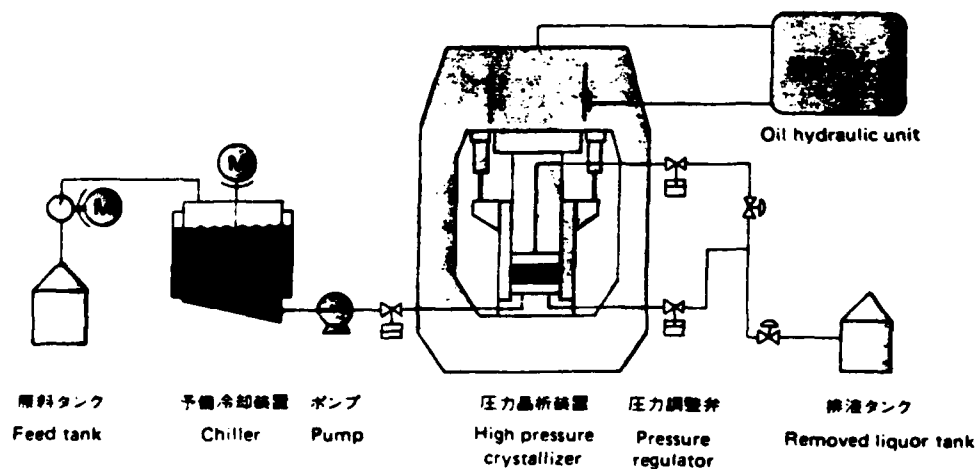
Figure 5. Diagram of Kobe Steel High Pressure Crystallization Process [25]
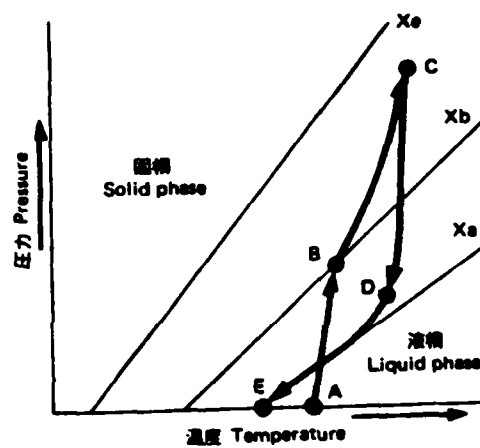
Figure 6. Pressure-Temperature relationship for Kobe
Steel adiabatic crystallization process [25]

a- equilibrium line of pure substance

b- equilibrium line for initial concentration

c- equilibrium line for eutectic concentration

After many trials, Moritoki and co-workers at Kobe Steel concluded that the distribution coefficient could be reduced with increasing pressure. At each pressure-temperature pair a distribution coefficient is obtained. From this coefficient an exit concentration can be calculated and is reported. For the benzene - cyclohexane system, Figure 7 was reported.[22]
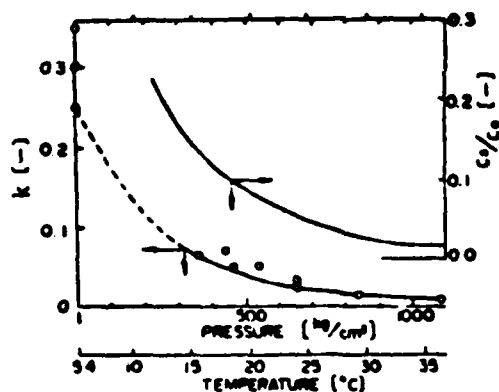
Figure 7. Relationship of k and C_s/C_o to operating conditions for benzene-cyclohexane system [22]

Systems under high pressure are subject to a second desirable effect. The eutectic has a tendency to move right, as in Figure 8. With increasing pressure, this allows for a greater possible theoretical separation.[23]
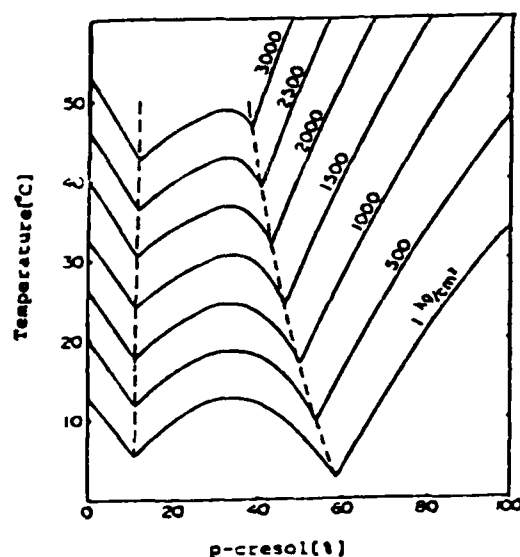
Figure 8. Phase diagram of m- and p-cresol [23]

The experimental values of the Kobe Steel group indicated that 90 - 100% of the theoretical yields could be obtained. Since this is a pressure change operation, several operations may be simply and rapidly carried out.

Pressure is rather uniform throughout the crystallizer and the operating cycle. This is the major factor which reduces the minimum operating cycle time and uniform impurity distribution.

Distillation

The purpose of this work is to economically compare
a design for a high pressure crystallization to
distillation. So a brief discussion of distillation is
warranted.

Distillation is defined as the process of producing
vapor from a liquid in a vessel and collecting and
condensing the vapors into liquids. This is done in many
steps with each step progressively purer. The separating
agent in distillation is heat and separation is based on
differences in vapor pressures or boiling points. The
following is an example of the vapor-liquid equilibrium
necessary to study distillation. Figure 9 is an example
of the vapor-liquid equilibrium relationship with a
McCabe-Thiele diagram. As seen in Figure 9, the higher
the desired purity the greater the number of stages
required. This side of the phase diagram, separation at
high purity is referred to as a pinch point.
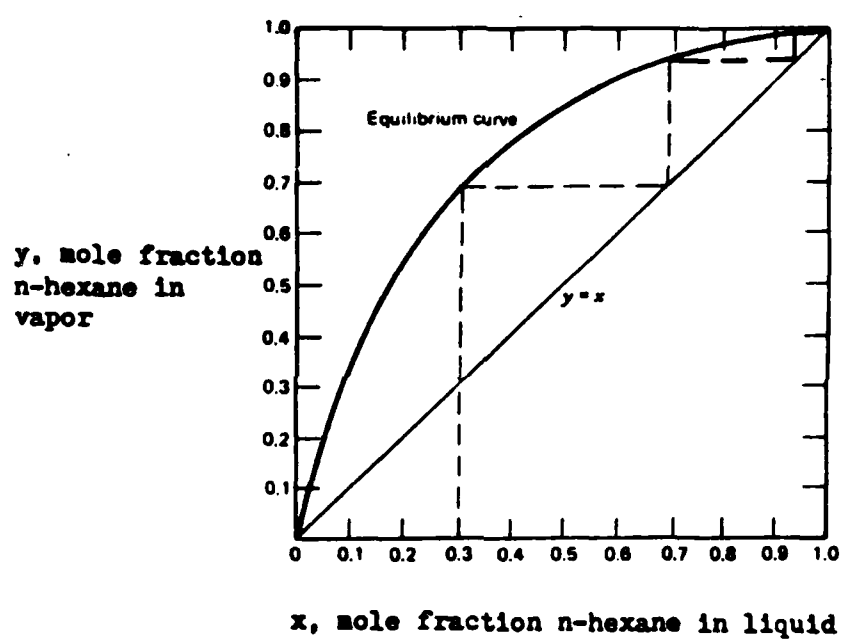
Figure 9. Vapor-liquid phase diagram for illustration.[30]

As illustrated in Figure 9, high increases in purity can be realized by distillation in the middle range but as an increasingly pure liquid is fed in each stage a lower increase in purity is realized. An increasing number of stages are required to obtain a product more than 99% pure. The result is a much higher energy cost.

Minimum Work

In an economic comparison, energy costs are also important. The minimum energy of separation related to the each process is different. The minimum work of each process is needed to compare. First distillation is studied. Then the minimum work applying to the high pressure process is examined.

Minimum Work of Distillation

King[17] classifies distillation as a potentially reversible process. That can be viewed similarly to a heat engine. The column operates by taking in heat and producing a separation. Then, the reversible heat entering would be:

$$Q_H \ (T_H - T_O)/T_O \hspace{3cm} (7)$$

The heat leaving would be:

$$Q_L \ (T_L - T_O)/T_L \tag{8}$$

Q_H – Heat entering the high temperature engine
Q_L – Heat entering the low temperature engine
T_H – High temperature
T_L – Low temperature
T_O – Reservoir temperature

The net work would be the difference between the heat entering and the heat leaving the system.

$$W_n = Q_H \ (T_H - T_O)/T_H \ - \ Q_L \ (T_L - T_O)/T_L \tag{9}$$

Assuming no mechanical work, the energy differences between the product and feed will be small. The heat flows reduce to:

$$Q_H = Q_L = Q \tag{10}$$

and equation (9) simplifies to:

$$W_n = Q \ T_O \ (1/T_L - 1/T_H) \tag{11}$$

If the condenser is considered the low temperature region and the reboiler considered the high temperature region, then equation (11) becomes:

$$W_n = Q_C \ T_O \ (1/T_C - 1 \ T_R) \tag{12}$$

Q_C is determined by using minimum reflux:[17]

$$L_{min} = \frac{x_d}{} \ x_f \ \ \propto \ \ \ \ \ \ \ \ \ \ \frac{1-x_f}{} \ d \tag{13}$$

Also, when ; the minimum reflux reaches a

$$L_{min} = \ \ \ \ \ \ \tag{14}$$

λ is the latent heat of vaporization.

$$Q_C = \lambda \, (L_{min} + d) \tag{15}$$

$$d/f = X_f. \tag{16}$$

Also for a close boiling mixture $L_{min} > d$. This and combining (15) and (16) leads to:

$$Q_c = \lambda \, / (\alpha - 1) \quad F \tag{17}$$

α and λ can be determined using the Clausius – Clapeyron equation:[8]

$$\frac{d \ln P}{d \, 1/T} = - \frac{\lambda}{R} \tag{18}$$

The overhead temperature, T_c, for a component in a complete separation is close to the boiling point of that component at the column pressure. Likewise, T_r is close to the boiling point of the less volatile component. The vapor pressure of the more volatile component at the bottoms temperature would be α times the column pressure. By integrating the Clapeyron equation, the result is:

$$\ln \alpha = \lambda / R \quad (1/T_C - 1/T_R) \tag{19}$$

With the assumption of an α close to 1 , or a close boiling mixture, $\ln \alpha$ equals $\alpha - 1$. The α for the benzene-cyclohexane system is 1.059 at $0^{\circ}C$, 1.027 at $25^{\circ}C$, and 1.003 at $50^{\circ}C$. The is some temperature dependence but the assumption of α close to 1 remains valid.

The assumption of   and by combining (11), (17) and (19):

$$W_n = R F T_o \qquad\qquad (20)$$

For any reflux above minimum, the equation would be increased by a factor of actual vapor rate divided by minimum vapor rate:

$$W_n = \text{(Actual vapor rate)/(Minimum vapor rate)} \; R \; F \; T_o$$
$$= (L_{Actual} + d)/(L_{min} + d) \; R \; F \; T_o$$

Minimum Work of Pressurization

The minimum work for the pressurization process is much simpler. If the assumption is made that the compression is done adiabatically, reversibly, the solid is pure, and all solid is recovered as pure product, then the minimum work is:

$$W = \int_1^2 P \, dV \qquad\qquad (21)$$

Given an equation of state for the solution, the work can easily be calculated.

IV. Design of Process

To do a specific comparison of distillation to high pressure crystallization, a material or system must be chosen. Benzene of 90% and cyclohexane of 10% were used. Benzene is an important building block for styrene or phenol in many modern synthetic fiber and resin processes.[19] Now that a system is chosen, the production rate must be determined. Presently, several conventional benzene production plants are under construction worldwide. These plants are designed for annual production rates between 10^5 and 10^8 Kg/year.[16] Also, Chaty[6] compares various industrial processes where the annual flow rates for benzene production are 10^6-10^7 Kg/year.[6] With these data, an annual production rate of 1×10^6 Kg/year was chosen.

The third decision is to determine a reasonable cycle time for the high pressure crystallization. Mortiki and co-workers[25] indicate a minimum cycle time for their process of 2 minutes, allowing 10 seconds for pressurization and equilibrium, 40 seconds for filtration and the remaining time for sweating and compacting.

Correspondence with Mr. Mortiki suggests a time of several minutes. The absence of data, and the decision to use an inert gas for the compression, required a high estimate of 30 minutes per cycle.

A phase diagram for this system is also necessary. Figure 10 is the phase diagram for the benzene-cyclohexane system.

Finally, an initial temperature of 25° C was selected for the adiabatic process.

Crystallizer Design with Gas Pressurization

A basis has been completed so the process equipment may now be sized. The separation of the cyclohexane is first determined. Moritoki published a relationship of solid phase concentration to initial concentration for the impurity, Figure 7.[22]

At 25° C, the C_s/C_o is found to be .027, which corresponds to a product of 99.7% benzene.

An outlet concentration must be selected for the mother liquor. There is an optimum between increase in pressure and reduction in waste. The outlet concentration was selected to be 75% benzene, corresponding to a maximum pressure of 1400 Kg/cm^2, as seen in Figure 10.[18] Assuming 8,000 hours of operation

and 16,000 cycles per year, the product rate per cycle is 62.5 Kg or 137.75 lbs.

Thus far, no specifics about the process have been discussed and the process layout need not be known.

The crystallizer is central to the design. The means by which to increase the pressure must also be provided. Therefore, a compressor, followed by a heat exchanger, will be necessary. The crystallizer feed stream may also need to be precooled to remove the heats of compression and fusion. Hence, the flow diagram would be Figure 11. The crystallizer is shown in Figure 12.
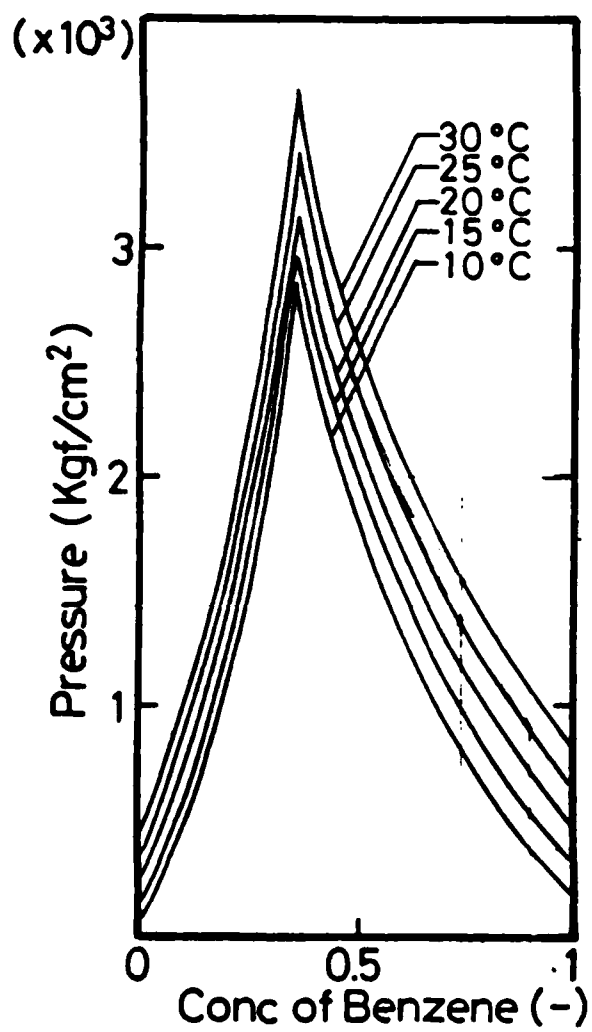
Figure 10. Phase diagram for benzene-cyclohexane
system [26]
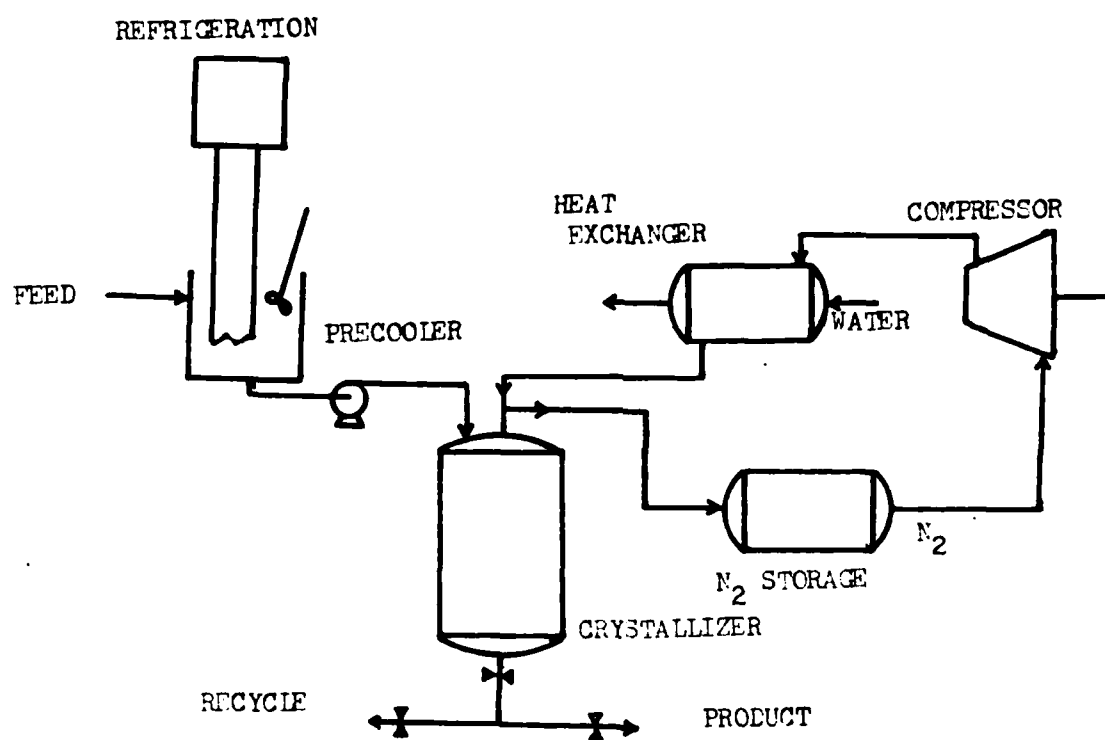
Figure 11. Flow diagram for gas pressurized
crystallization process

FEED   GAS

SCRFEN

DRAIN
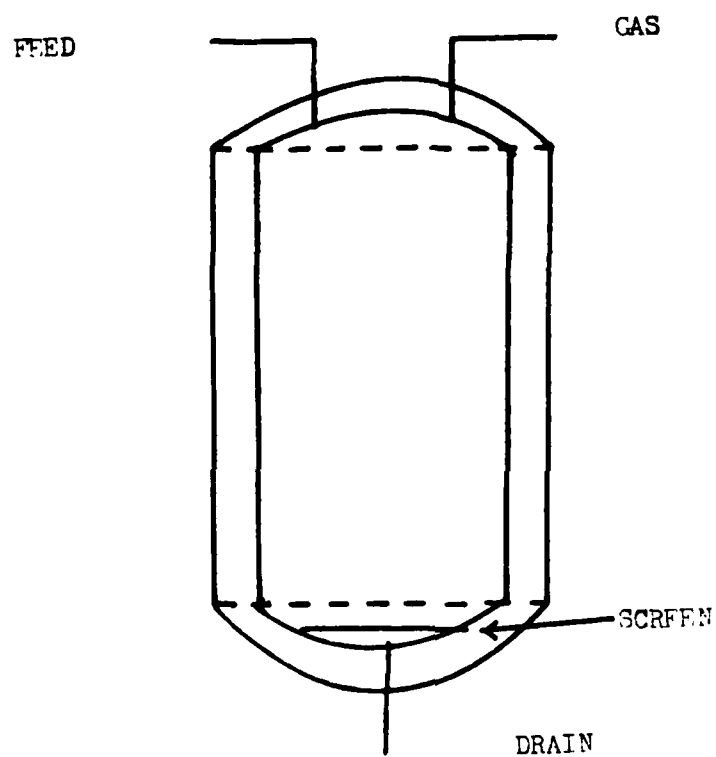
Figure 12. Crystallizer for gas pressurization process

Mass Balance

Knowing concentrations in all streams and the
product flow rate, a mass balance may be completed on
the crystallizer loop.

$$C_s = .002$$
$$C_o = .1$$
$$C_w = .25$$

Product = 62.5 Kg/cycle

Total Mass: Feed = Product + Waste   (22)
Cyclohexane Mass: $C_o \cdot$ Feed = $C_s \cdot$ Product + $C_w \cdot$ Waste (23)

(.1)(Feed) = (.002)(62.5) + (.25)(Waste)

by solving (22) and (23).

Feed = 102.9 Kg/cycle
Waste = 40.4 Kg/cycle

Crystallizer Volume at P_o

At atmospheric pressure, the feed volume is known
and the system volume can be calculated.

$$\text{Volume} = (M_{BZ})(V_{BZ}) + (M_{CH})(V_{CH}) \qquad (24)$$

$$V_{BZ} = 1.138 \text{ cm}^3/\text{gm}$$

$$V_{CH} = 1.284 \text{cm}^3/\text{gm}$$

Volume = (102.9)(.9)(1.138) + (102.9)(.1)(1.284)

Volume = 118.62 L

Crystallizer Volume at P

For benzene, Gehrig and Lentz[9] report a modified
Tait equation for P in MPa:

$$\frac{V_O - V}{V} = A \ln \frac{(B + P)}{(B + P_O)} \qquad (25)$$

In the 25^O C range:

A = .1845
B = 194.5 MPa.

For cyclohexane, another version of the Tait equation is reported for P in Kp/cm^2:[33]

$$\frac{V_O - V}{V_O} = C \log \frac{B + P}{B} \qquad (26)$$

In the 25^O C range:

C = .2272
B = 723.3 Kp/cm^2 .

P is 1400 Kg/cm^2 at 25^O C and 75% benzene. Also, P_O is 1 atm and the V_O's are:

$V_{O\ BZ}$ = 1.138 cm^3/gm
$V_{O\ CH}$ = 1.284 cm^3/gm

Each equation of state uses different units of pressure.

P =1400 kg/cm^2 =137.0 MPa =1350 atm =1395 kp/cm^2

$$\frac{V_{O\ BZ} - V_{1\ BZ}}{V_{1\ BZ}} = .1845 \ln \frac{194.5 + 137.0}{194.5 + .101}$$

$$V_{1\ BZ} = 1.036\ cm^3/gm$$

From Bridgman[5], the change in volume of solid benzene $\Delta V/V_o$ is .0902.[5]

$$\frac{\Delta V}{V_o} = \frac{V_o - V}{V_o} = .0902$$

$$V_{s\ BZ} = .943\ cm^3/gm$$

$$\frac{V_{o\ CH} - V_{l\ CH}}{V_{o\ CH}} = .2272\ \ln \frac{920 + 1395}{920}$$

$$V_{l\ CH} = 1.167\ cm^3/gm$$

At the maximum pressure, the volume will be composed of the product amount of solid and the liquid quantity of waste.

Volume = solid benzene + liquid benzene
            + liquid cyclohexane

Volume = (167.5)(.943) + (40.4)(1.036)
            + (40.4)(.25)(1.167)

        = 102.1 L

Liquid Volume = 43.2 L

Nitrogen Needed

The volume decrease between P and P_o can now be calculated and the amount of liquid is known. The amount of nitrogen needed to be compressed is calculable. This solubility data on Nitrogen in benzene is available at 120 atm and $25°$ C.[11] It is

understood that the operating pressure of the system is much higher. But, at the highest pressure the system would be mostly solid. The solubility of nitrogen in the solid would be small. These data will be assumed close for this liquid system.

$$X_{N2} \quad = .0551 \quad \text{mole fraction}$$
$$\phantom{X_{N2}} \quad = .02050 \quad \text{mass fraction}$$

So, the nitrogen dissolved is:

mass solution = (.02050)(40.4)
$$\phantom{\text{mass solution}} = .828 \text{ Kg}$$

$$\Delta V = 118.6 - 102.2$$
$$ = 16.5 \text{ L}$$

$$P \Delta V = ZnRT$$

$$P_r = 40.3$$

$$T_r = 2.36$$

$$Z = 2.2$$

$$(1350)(16.51) = (2.2) \, n \, (82.06)(298)$$

n = .4140 Kg mole
$$ = 11.59 \text{ Kg}$$

Total mass nitrogen = 12.68 Kg

Due to the assumed solubility this may be a high estimate.

The volume (SCF) of gas can also be calculated:

(1) V = (.4530)(.7306)(637)
$$ = 463 \text{ SCF}$$

Pressure Vessel Design

The crystallizer, a high pressure vessel, has a large number of regulations involved with its design. The American Society of Mechanical Engineers, (ASME), have established rules and standards governing safety, design, fabrication and inspection.[1] The desired vessel is a cylindrical shell with a 50 cm ID and 2:1 ellipsoidal heads. The maximum pressure is 19,700 psi and material of construction is A-302B with an allowable stress of 26,500 psi.[1] All joints will be fully radiographed in accordance with UW-11(a), Reference 1. The joint efficiency is 1.0 when joints are fully radiographed.

Shell circumferential stress is calculated for thick cylindrical shells from Appendix 1,1-2(a)(1), Reference 1.

$$t = R (Z^{.5} - 1) \qquad (29)$$

$$Z = \frac{S \times E + P}{S \times E - P} \qquad (30)$$

$$t = (25) \left[\frac{(26500 + 19700)}{(26500 - 19700)} \right]^{.5} - 1$$

$$= 40.2 \text{ cm}$$

Shell longitudinal stress is also calculated for thick cylindrical shells in accordance with Appendix 1, 1-2(a)(2), Reference 1.

$$t = R (Z^{.5} -1) \tag{31}$$

$$Z = (P/(S \times E) +1) \tag{32}$$

$$t = (25)((19700/26500 +1)^{.5} -1)$$

$$= 8.01 \text{ cm}$$

The largest of the two values is used. The shell thickness would be 40.2 cm. The heads are to be 2:1 ellipsoidal in accordance with UG-32(d), Reference 1.

$$t = \frac{P \times D}{2 S \times E - .2 P} \tag{33}$$

$$= \frac{(19700)(50)}{(2)(26500)(1)-(.2)(19700)}$$

$$= 20.07 \text{ cm}$$

To proceed further in sizing the crystallizer the length of the vessel must be determined. This is found by subtracting the volume if the heads from the total volume needed and dividing that difference by the crystallizer cross-sectional area. Once the length is known, an approximate volume of the construction material of can be found. Since pressure vessels are

roughly priced by total weight, these calculations will complete the cost.

$$V_E = 4/3 \ \pi \ a \ b \ c \qquad\qquad (34)$$

The variables a, b, and c are the lengths of the semi-axies.

$$V_E = (4/3) \ \pi \ (25) \ (25) \ (12.5)/(1000)$$
$$\quad = 32.7 \ l$$

$$V_S = 135.3 - (2)(32.7)$$
$$\quad = 69.9 \ l$$

$$L_S = V_S/\pi \ R^2$$
$$\quad = (69900)/\pi \ (25)^2$$
$$\quad = 35.6 \ cm$$

The volume of building material of the shell and the heads must be determined. The volumes calculated using the outside radius are subtracted from the volume inside radius.

$$V_{MS} = \pi \ L \ ((R+t_S) - R) \qquad\qquad (35)$$
$$\quad = \quad 35.6 \ ((25+ 40.2) - 25)$$
$$\quad = 4.053 \times 10^5 \quad cm^3$$

$$V_{MH} = (4/3) \ \pi \ ((a+t_H)(b+t_H)(c+t_H)-abc) \qquad (36)$$
$$\quad = (4/3) \ \pi \ ((45.1)(45.1)(32.6)-25^2 \ 12.5)$$
$$\quad = 2.778 \times 10^5 \quad cm^3$$

$$V_{total} = 9.609 \times 10^5 \quad cm^3$$
$$\quad = .29 \ lb/in^3$$
$$\quad = 1.77 \times 10^{-2} \ lb/cm^3$$

$$Mass = 1.204 \times 10^4 \ lb$$

Applying data from Figure 6, Reference 6, the cost per pound would be $ 1.20 and an additional $ .60 for stainless steel construction.

Total cost = $ 21,700

Minimum Work

Finally, the minimum work for the compression of the liquid mixture must be calculated. This calculation, as stated earlier, is simply the integral of PdV. The work is calculated in 3 parts.

The integrals of PdV for liquid benzene and liquid cyclohexane are summed over each range of specific volume. The integral of PdV is also calculated for the transition of benzene from liquid to solid and the compression of the solid. The following equations are used;

for liquid benzene:[9]

$$\frac{V_o - V}{V} = A \ln \frac{B + P}{B + P_o} \qquad (25)$$

for liquid cyclohexane:[33]

$$\frac{V_o - V}{V_o} = C \log \frac{B + P}{B} \qquad (26)$$

The benzene liquid – solid transition is known. Data from Bridgman for solid benzene was developed into the line for the P-V relationship over the interval 680 < P < 1500 kp/cm^2.[5]

$$P = 101,500 \ (V_o - V)/V_o \ - 15,520 \qquad (37)$$

For illustration, large step sizes will be used. More reasonable steps are used with a design program to be used with Flowtran, only a few points are reported and graphed. Data was only available for one point between the pressure of initial crystallization and the highest pressure achieved. These data give the line above.

Table 1
Results of Work Done on Liquid Components

Pressure (Kg/cm²)	Pressure average (atm)	ΔV (L/Kg) 10^{-3}	Benzene Pave ΔV (atm L/Kg)	ΔV (L/Kg) 10^{-3}	Cyclohexane Pave ΔV (atm L/Kg)
1					
100	49.0	1.000	.5	1.273	.6
200	145.6	.920	1.3	1.152	1.7
300	242.7	.855	2.1	1.068	2.6
400	339.8	.805	2.7	.967	3.3
500	436.9	.745	3.3	.908	4.0
600	534.0	.700	3.7	.845	4.5
700	631.1	.655	4.2	.790	5.0

Total work per kilogram   17.8
(atm L/Kg)

Pressure (Kg/cm²)	Pressure average (atm)	ΔV (L/Kg) 10^{-3}	Benzene Pave ΔV (atm L/Kg)	ΔV (L/Kg) 10^{-3}	Cyclohexane Pave ΔV (atm L/Kg)
800	728.2	1.88	13.7	.748	5.4
900	825.2	.66	5.4	.707	5.8
1000	922.3	.63	5.8	.673	6.2
1100	1019.4	.61	6.2	.629	6.4
1200	1116.5	.58	6.5	.605	6.7
1300	1213.6	.55	6.7	.573	7.0
1350	1286.4	.27	3.5	.280	3.6

Total work per pound   65.6   62.9
(atm L/Kg)

Table 2
Results of Work Done on Solid Benzene

Pressure (Kg/cm²)	Pressure (average) (atm)	ΔV_{TRANS}	V (L/Kg)	ΔV	Pave ΔV PaveΔV_{TRANS} (atm L/Kg)
680		.1596	1.045		
1400	1003	.1794	1.051	.00494	4.95 179.9
2500		.1992	1.058		

Total work per pound   184.9
(atm L/Kg)

These totals can be multiplied by the quantity of
each component of the mixture to give an estimate of
the work required for the compression.

Work = Solid Benzene + Liquid Benzene
        + Liquid Cyclohexane   (38)
     = (184.9)(62.5) + (65.6)(30.2) + (17.8)(62.5)
        + (62.9)(10.3)

     = 15,300   L atm
     = 1500   BTU
     = 10.25   BTU/Kg

Tables 1 and 2 give reasonable estimates for the
work required. A more accurate model was constructed
by writing a FORTRAN program to do the above
calculations. Table 3 gives the result of that program
and Figure 13 graphically shows the pressure-
temperature relationship.

Table 3
Work on Benzene-Cyclohexane System

Pressure(atm)	Work(BTU)		Temperature
	Cycle	lb Product	Difference(^{O}F)
23.6	7	.1	.1
158.9	75	.6	.8
294.2	174	1.3	1.9
429.5	286	2.1	3.2
564.9	405	2.9	4.5
700.2	524	3.8	5.8
835.5	645	4.7	7.1
970.9	765	5.6	8.5
1016.0	862	6.3	9.5
1061.1	961	7.0	10.6
1106.2	1044	7.6	11.6
1151.3	1116	8.1	12.4
1196.4	1180	8.6	13.1
1241.5	1238	9.0	13.7
1286.6	1291	9.4	14.3
1331.7	1407	10.2	16.7

Precooler

From the data it is clear that the heat of
compression (work) and heat of fusion must be removed.
This will allow the system to crystallize at the
desired temperature of 25 ^{O}C. A cooler must be
designed to remove 1407 BTU per operating cycle.
Again, an overall heat transfer coefficient of 26
BTU/lbmol ft^{2} ^{O}F will be used. The temperature
difference will be 20 ^{O}F. This will be carried out in
a stirred jacketed tank.

This process needs some means of cooling the feed
stream by removing 1407 BTU in 2/3 of a cycle. A
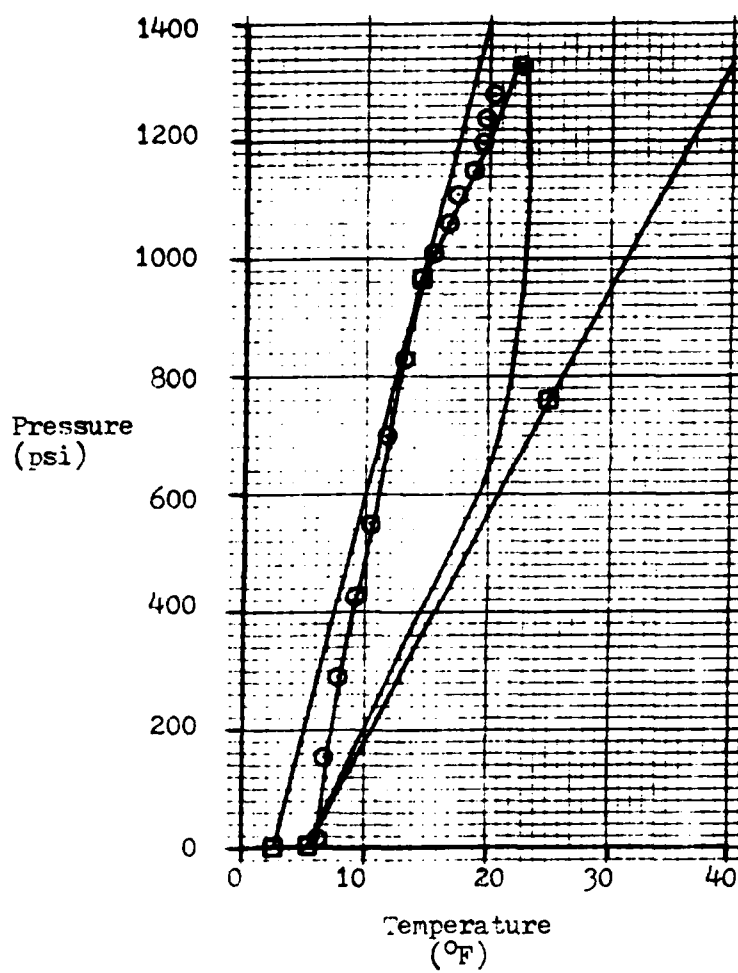
Figure 13. Pressure-temperature relationship for benzene-cyclohexane system.

```
HIGH PRESSURE CRYSTALLIZER
BLOCK - BHPC      NAME - CRYS
OPERATING PRESSURE = 1354.292ATM
CRYSTALLIZER VOLUME =   117.779L
SPECIFIC VOLUME OF BENZENE [cc/g]
LIQUID AT PO 1.13800            LIQUID AT P 1.05327
SOLID AT P 0.95638
SPECIFIC VOLUME OF N-HEXANE [cc/g]
LIQUID AT PO =  1.28400          LIQUID AT P =  1.16857
SHELL THICKNESS[IN]=15.55492SHELL MASS[LB]=     8693.15
HEAD THICKNESS[IN]= 7.83211HEAD MASS[LB]=     3954.87
CRYSTALLIZER COST = $  22766.44
MINIMUM WORK PER HOUR =     2815.598BTU
MINIMUM WORK PER POUND PRODUCT   9.483
NITROGEN DISTRIBUTION [LB]
IN SOLUTION =      6.60IN GAS PHASE =     23.37
CONCENTRATION OF IMPURITY (N-HEXANE)
IN = 0.097414PRODUCT = 0.001656MOTHER LIQUOR = 0.750000
```

Figure 14. Flowtran output for gas pressurized
system

refrigeration plant of .40 ton-day capacity would be sufficient. Figure 13-81, Reference 30, has data on NH_3 refrigeration plants. The ammonia expansion is assumed at constant temperature so the assumed temperature difference is tolerable. A system capable of 10 ton-day would cost $ 17,000.

    Refrigeration Plant
    Cost = 17,000 (.40/10)$^{.6}$
        = $ 2,500

    Heat Transfer
    A = $\Delta H/U \Delta T$ (39)
      = (1407)(6)/(26)(20)
      = 15.8 ft^2

Cost for heat transfer area[30] = $1700

The volume of the tank should equal that of the crystallizer, 40 gallons.

Cost mixed tank[30] = $4000 for 100 gallons

Cost = 4000 (40/100)$^{.6}$
     = $2300

Total Precooler Unit Cost = $ 6,500

Compressor and Heat Exchanger

The gas compressor must be specified. A multi-stage compressor should be used since the outlet pressure exceeds the inlet pressure by more than 5 times. A single stage reciprocating compressor will be used, because, a small volume of gas is to be compressed.

First, the gas flow rate must be calculated. The compression will be 10 minutes of the 30 minute cycle time for each crystallization cycle.

$$q = V/t = ZnRT/Pt \tag{40}$$
$$= \frac{(2.2)(.4140)(82.06)(298)}{(10)(13.6)}$$

$$= 74.39 \text{ L/min}$$
$$= 2.627 \text{ ft}^3/\text{min}$$

The appropriate equation to determine the power requirement is the first law of thermodynamics.[4]

$$Q - W_n = U_2 - U_1 - \int h_{IN} \cdot dm \tag{41}$$

The system is adiabatic and the values of enthalpy are found in data on nitrogen. [2]

$$U = H - P \cdot V \tag{42}$$

The first law simplifies to:

$$- W_n = (H_2 - P_2 \cdot V_2) - (H_1 - P_1 \cdot V_1) - H_1 \cdot \Delta m \quad (43)$$

$$- W_n = (6316 - (150)(51.88)) - ((-38) - (1.5)(1659)) - (38)(453)$$

$$- W_n = 448.3 \text{ BTU/cycle}$$

The minimum work the compressor must do is the sum of the minimum work on the liquid and the minimum work on the nitrogen gas. This sum multiplied by a 72% effiency for the compressor and divided by the time the compressor operated would give an approximate power requirement for the compressor motor.

$$- W_n = \text{Work on Gas} + \text{Work on Liquid} \quad (44)$$
$$= 448.3 + 1407$$
$$= 1855 \text{ BTU}$$

$$\text{Power} = 1855/(.72)(600)$$
$$= 6.07 \text{ hp}$$

Also with similar data on nitrogen,[2] the outlet temperature can be calculated.

$$\Delta H = (H_2 - H_1)/E \quad (45)$$
$$= C_p^2 dT \quad (46)$$
$$H_2 = 6316 \text{ J/gmol}$$
$$H_1 = 38 \text{ J/gmol}$$
$$C_p = 35.0 \text{ J/gmol} \cdot {}^\circ K$$
$$\Delta T = (6316 - 38)/(32.0)(.72)$$
$$\Delta T = 195 \; {}^\circ C$$
$$= 382 \; {}^\circ F$$

The compressor is sized by a correlation of cost vs power.[30] The required power is lower than any graphed, so a cost size extrapolation factor is used.

For 100 hp, the cost of the unit is \$30,000 at 5000 psi.[14] This must be extrapolated to 8.1 hp and 20,000 psi discharge.

$$\text{Cost} = 30,000 \ (6.1/100)^{0.8} \ (20,000/5,000)^{0.8}$$
$$= \$ \ 9,700$$

The heat exchanger may be designed knowing the compressor design, the heat capacity of nitrogen and the outlet temperature of the gas. The compressed gas temperature must be lowered to the crystallizer temperature, 298° K.

$$\text{Mass flow rate} = .4140 \ \text{Kgmol/10 min}$$
$$= .04140 \ \text{Kgmol/min}$$

$$\Delta H = H_2 - H_1$$
$$= 898 - 6316$$
$$= -5418 \ \text{J/s}$$
$$= .09930 \ \text{BTU/s}$$

The heat flow rate must equal the change in energy in the nitrogen stream.

$$\Delta H = U \ A \ \Delta T_{lm} \tag{47}$$

U for gases and water is in the range of 2-50 BTU/lbmol$\cdot$ft$^2 \cdot ^{\circ}$F,[30] an average of 26 BTU/lbmol$\cdot$ft$^2 \cdot ^{\circ}$F will be used to calculate an approximate area. The coolant will be water inlet 65° F and outlet 90°F.

$$\Delta T_{lm} = (\ \Delta T_i - \Delta T_o)/\ln \ (\Delta T_i/\Delta T_o) \tag{48}$$
$$= (12.0 - 292)/\ln \ (12.0/292)$$
$$= 87.7 \ ^{\circ}F$$

$$A = \Delta H/(U \Delta T_{lm}) \quad\quad (39)$$
$$= (.09930)(3600)(6)/(26)(87.7)$$
$$= .94 \ ft^2$$

With area and pressure known, a corresponding cost can be determined form graphical data. Such data is available in Figure 14-17, Reference 30. With an area of 1.0 ft^3 and stainless steel construction, the cost is \$1300.00. An adjustment factor for higher pressure is needed. Using the size adjustment factor of .44 for pressure vessels and since the change in pressure is a change in size,[30] this will be assumed to apply:

$$Cost = 1300 \ (20,000/600)^{.44}$$
$$= \$ \ 6000$$

Nitrogen Storage

A storage vessel must be used to recover the nitrogen let down from the crystallizer. The gas will be stored at 200 psi and enough gas for 5 cycles will be stored. Some loss will result from gas in solution and the volume of gas left at 200 psi.

$$Total = .414 \ Kgmol \times 5$$
$$= 2.07 \ Kgmol$$

$$(13.3)(V) = (2.07)(87.06)(298)$$

$$V = 3,805 \ L$$
$$= 134 \ ft^3$$

This tank will be designed like the crystallizer. A radius of 36 inches and height of 60 inches will be used for a finished volume of 141 ft^3.

Shell circumferential stress:

$$t = P \times R/(S \times E - .6P) \qquad (40)$$
$$= (200)(36)/((15000)(1) - (.6)(200))$$
$$= .484 \text{ in}$$

Shell longitudinal stress:

$$t = P \times R/(S \times E - .4P) \qquad (41)$$
$$= (200)(36)/((2)(1500)(1) - (.4)(200))$$
$$= .239 \text{ in}$$

2 heads elliptical heads 10%

$$t = P \times D/(2S \times E - .2P) \qquad (33)$$
$$= (200)(72)/((2)(15000)(1) - (.2)(200))$$
$$= .480 \text{ in}$$

The mass of the tank is necessary to complete the cost determination.

$$\text{Volume shell} = \pi ((R+t)^2 - R^2) \, L \qquad (35)$$
$$= \pi ((36.484)^2 - 36^2) (60)$$
$$= 6610 \text{ in}^3$$

$$\text{Volume head} = (4/3) \pi (a+t)(b+t)(c+t) - abc \qquad (36)$$
$$= (4/3) \pi (36.24)(18.24) - (36)(18)$$
$$= 5300 \text{ in}^3$$

$$\text{Density} = .284 \text{ lb/in}^3$$

$$\text{Total volume} = 17,200 \text{ in}^3$$
$$\text{Total mass} = 4,890 \text{ lb}$$

Cost from Figure 6, Reference 7, is $0.80 per pound for low alloy steel.

$$\text{Cost} = \$ 3,900$$

Monsanto's Flowtran has an extensive library of unit operations to model most processes.[32] Often there is a need to develop new programs for unit processes not in the library. A program to be used in conjunction with Flowtran has been developed. This program does the work of the previous design. This is a batch process though and as such does not convert well with Flowtran. This creates problems with using the program. A listing of the Flowtran program can be found in the Appendix. Figure 14 is the output of the new Flowtran block. As seen the program reports many of the intermediate values as well as the cost of the vessel.

Distillation Column

The distillation column for comparison with the crystallizer can also be modeled by Flowtran. The overall rates will be the same but they must be converted to continuous rates. The parameters of the column were first determined by a preliminary Flowtran model which used the Underwood equation. The parameters were reflux ratio, number of trays, feed plate, bottoms pressure, condenser pressure, and distillate to bottoms ratio. Those parameters were used with a more rigorous model. The rigorous model selected the diameter. The
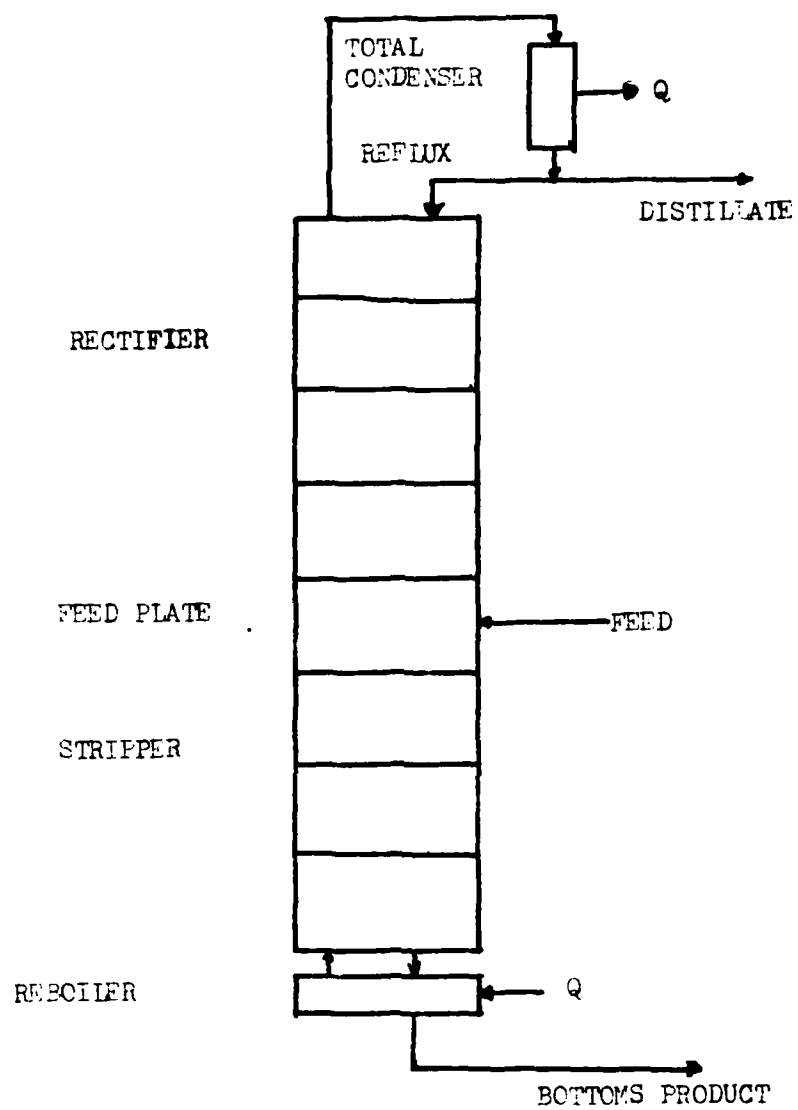
Figure 15. Diagram of distillation column

```
TITLE DISTILLATION COLUMN FOR COMPARISON
PROPS 2 1 2 2 2
RETR CH BZ
PRINT POUNDS
BLOCK DIST DISTL S1 S3 S2
PARAM DIST 1 28.9 60 45 15 13 .3982 0 0 0
BLOCK DICO CDSTL DIST
PARAM DICO 1 0 0 0
LBS S1 1 45.3 408.2
TEMP S1 70
PRESS S1 14
END CASE
.END JOB
```

DISTILLATION COLUMN FOR COMPARISON

PHYSICAL PROPERTY OPTIONS
    ANTOINE VAPOR PRESSURE
    REDLICH-KWONG VAPOR FUGACITY
    CORRECTED LIQUID FUGACITY
    SCATCHARD-HILDEBRAND ACTIVITY COEF

Figure 16. Input to Flowtran simulation

DISTILLATION COLUMN FOR COMPARISON

DIST   - DISTL - TOTAL CONDENSER
   FEED = S1 , BOTTOMS = S3 , OVERHEAD = S2
   REFLUX RATIO= 28.90, NO. OF PLATES =   60., FEED PLATE= 45.
   FRAC OVHD   = 0.398, FEED FRAC VAPOR= 0.000
   CONDENSER DUTY= 0.8940E+06BTU/HR, TEMP= 176.52F, PRES= 15.00PSIA
   REBOILER DUTY= 0.9133E+06BTU/HR, TEMP= 169.73F, PRES= 13.00PSIA

DICO (DISTC) COST FOR UNIT DIST
   NUMBER OF DIAMETERS   1.   REFLUX RATIO   28.900
   NUMBER OF TRAYS   60.0   TYPE OF TRAY   3.
   MOC FACTOR FOR TRAYS   1.00   TRAY COST UPDATE FACTOR   124.0
   LOADING AT TOP   0.85   LOADING AT BOTTOM   0.85
   PLATE SPACING AT TOP   18.   PLATE SPACING AT BOTTOM   18.
   SURFACE TENSION AT TOP   20.   SURFACE TENSION AT BOTTOM   20.
   FOAMING FACTOR AT TOP   1.00   FOAMING FACTOR AT BOTTOM   1.00
   OVERALL U FOR CONDENSER   100.0   COOLANT TEMP IN   80.00
   COOLANT TEMP RISE   20.00   MINIMUM TEMP APPROACH   10.00
   COOLANT HEAT CAPACITY   1.00   COOLANT SPECIFIC GRAVITY   1.00
   CONDENSATE SUBCOOLING   0.00   PRESSURE FACTOR-CONDENSER   1.00
   TYPE OF CONDENSER   -1.   TUBE LENGTH FACTOR-COND   1.00
   MOC FACTOR FOR CONDENSER   1.00   CONDENSER UPDATE FACTOR,   124.0
   COOLANT COST-C/MGL   3.00   HEATING FLUID COST-C/MLB   56.00
   HEATING FLUID MAX TEMP   700.00   REBOILER HEAT FLUX   12000.
   MIN TEMP DIF FORFLUX   1.00   HEATING FLUID DELTA H   1000.
   TYPE OF REBOILER   -1.   MOC FACTOR FOR REBOILER   1.00
   PRESSURE FACTOR-REBOILER   1.00   TUBE LENGTH FACTOR-REBL   1.00
   REBOILER UPDATE FACTOR   124.0   SKIRT HEIGHT   10.0
   STRESS IN COLUMN SHELL   14000.   CORROSION ALLOWANCE   0.000
   EXTRA WEIGHT ITEMS   2500.   SHELL COST,$/LB   0.50

   CONDENSER-
      CONDENSER DUTY, BTU/HR =   0.89403755E+06
      LOG MEAN TEMP DIFFERENCE =   86.13 DEG F
      AREA = 103.80 SQ FT
      COOLANT FLOW RATE =   89.404 GPM
      CONDENSER COST = $ 1280.00
      COOLANT COST = $/HR   0.16

   REBOILER -
      REBOILER DUTY, BTU/HR =   0.91326925E+06
      AREA =   76.11 SQ FT
      STEAM FLOW RATE =   913.269 LB/HR
      REBOILER COST = $ 1030.00
      STEAM COST = $/HR   0.51

   COLUMN DIAMETERS-   COLUMN HEIGHT, FT   = 100.00
      BELOW FEED 2.0000   SHELL THICKNESS, IN = 1.6250
      ABOVE FEED 2.0000   SHELL THICKNESS, IN = 1.6250
      COST OF COLUMN SHELL = $ 22270.00
      TRAY COST = $ 3620.00

   TOTAL UTILITY COST= $/HR   0.67

   COLUMN CAPITAL COST   = $ 28200.00

Figure 17. Flowtran output for distillation column

desired result was a column optimized between operating cost and capital cost while producing a product of equal purity to the crystallization process. The process diagram is shown in Figure 15. The Flowtran input is in Figure 16. The results of the Flowtran design are shown in Figure 17.

Crystallizer Design with Hydraulic Compression

An alternate to the high pressure design can also be proposed. Figure 18 is a diagram of the alternate design. It is still a high pressure process but, instead of an inert gas pressurizing the system the pressure is supplied hydraulically and intensified. The crystallizer, Figure 19, is a double ended piston and cylinder arrangement. On one end an incompressible fluid is pumped to supply the force on the piston. The force is equal to pressure-area of piston product. The area of the crystallizer piston is much smaller than the fluid piston allowing a large increase in pressure.

$$P_2 = P_1 \ (A_1/A_2) \tag{42}$$

The design of these two pressure vessels and the piston will be similar to the pressure vessels presented before.
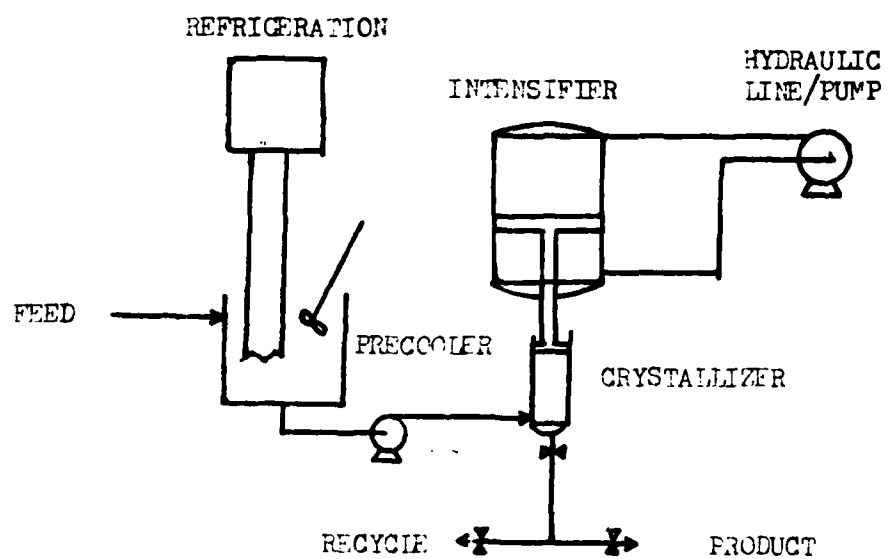
Figure 18. Diagram of hydraulically pressurized
high pressurization process

HYDRAULIC LINE

LOW PRESSURE
VESSEL

PISTON

HIGH PRESSURE
VESSEL

SCREEN

DRAIN / FEED
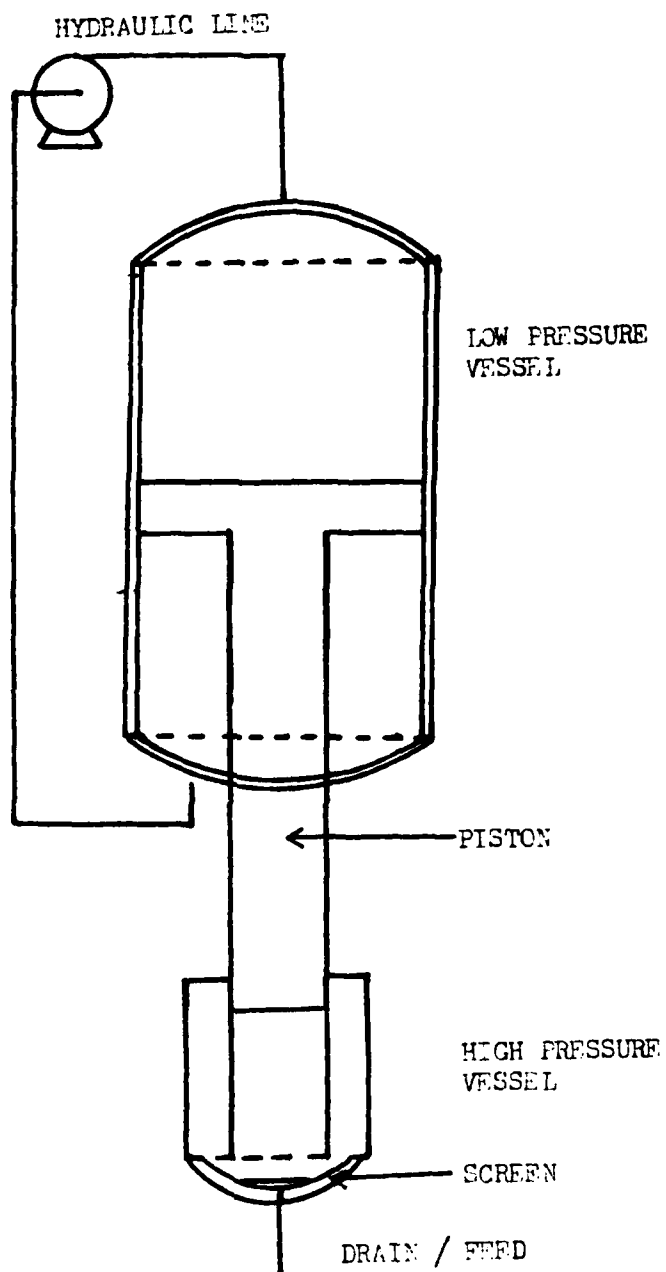
Figure 19. Diagram of crystallizer for
hydraulically pressurized process.

Crystallizer Similarities

This process has several similarities to the previous crystallization process. First, the mass balances and cycle times will be the same. This will also force the crystallizer volume to be the same. The minimum work on the liquid will also be equal due to the above reasons. The minimum work will necessarily be less than the gas compression process, since there is no work on gas compression. This will also make the operation expense of this process lower than the first process. The final similarity is the precooler. The work done on the fluid and the heat of fusion liberated will be the same so the precooler size and cost will be the same.

Pressure Vessel Design

The material of construction will also be the same as the first design, 302-SS. The low pressure fluid will be 200 psi. The area difference of the two piston heads can be calculated with the vessel diameters and wall thicknesses of the shells and heads. Subscripts 1 and 2 are for the high and low pressure ends, respectively.

Area

$$20,000 = 200 \ (A_2/A_2)$$
$$A_2 = 320 \text{ cm}^2$$
$$A_1^2 = 32,000 \text{ cm}^2$$

Radius

$$r_1 = 10.1 \text{ cm}$$
$$r_2^1 = 101 \text{ cm}$$
$$L_1^2 = 370 \text{ cm}$$

Thickness and volume of high pressure vessel are calculated as the previous high pressure vessel, p.37-40.

$$t_{SH2} = 16.2 \text{ cm}$$
$$V_{SH2} = \pi \ (26.3 - 10.1) \ 370$$
$$= 685,000 \text{ cm}^3$$

$$t_{H2} = 8.10 \text{ cm}$$
$$V_{H2} = (4/3) \ \pi \ [(18.2)^2(13.2)$$
$$- (10.1)^2(7.6)]$$
$$= 4500 \text{ cm}^3$$

Using the area and the volume, the crystallizer dimensions can be calculated. The volume of solid is the total volume with the liquid volume subtracted. The volume of solid will allow calculation of the piston length, since it is the maximum travel of the piston. The volume of the low pressure vessel may also be calculated from this length.

$$V_{solid} = 58.9 \text{ L}$$
$$L_{piston} = (58.9)(1000)/(320)$$
$$= 200 \text{ cm}$$

Thickness and volume of low pressure shell

$$V_{SH1} = (200)(32,000)$$
$$= 6400 \text{ L}$$

$$t_{SH1} = 1.36 \text{ cm}$$

$$t_{H1} = .673 \text{ cm}$$

$$V_{SH1} = \pi (102.36^2 - 101^2)\ 200$$

$$= 173,500 \text{ cm}^3$$

$$V_{H1} = (4/3)\ \pi\ ((101.673)^2(51.173)$$

$$- (101)^2(50.5))$$

$$= 58,00 \text{ cm}^3$$

$$\text{Piston Volume} = (200)\ \pi\ (10.1)^2 + (10)\ \pi\ (101)^2$$

$$\text{Total Volume Material} = 1.306 \times 10^6 \text{ cm}^3$$

$$\text{Material density} = 1.77 \times 10^{-2} \text{ lb/cm}^3$$

$$\text{Material Cost} = \$\ 1.80$$

$$\text{Total Cost} = \$\ 41,600$$

Hydraulic Pump

The pump for the low pressure fluid should be specified to pump the total amount of fluid in 2/3 of the cycle time. It can be sized from graphical data, Figure 13-42, Reference 20.

$$\text{Flow rate} = (6400)/(20)(3.178)$$
$$= 22 \text{ gpm @ } 200 \text{ psi}$$

The cost found is $ 2000 for a discharge of 100 psi. This needs to be adjusted to 200 psi.

$$\text{Cost} = 2000\ (200/100)^{.6}$$
$$= \$\ 3100$$

The pump also needs a 10 hp motor which costs $ 650 from Figure 13-56, Reference 30.

Three processes have been designed to perform the same separation. Two designs crystallize the material as means of separation. The third is a distillation process, which separates by vaporization. The summary of major equipment and operating costs for these processes is located in Table 4. The summary of operating cost is in Table 5.

Table 4
Summary of Crystallization and Distillation Processes

1. <u>Crystallizer with gas compression</u>

Unit	Specifications	Cost(1985 $)

Crystallizer	302-stainless steel
	Shell r = 25 cm
	    l = 35.6 cm
	    t = 40.2 cm
	Ellipsoidal heads
	  r_1 = 25 cm
	  r_2 = 25 cm
	  r_3 = 12.5 cm
	  t = 20.1 cm
		53,200

Compressor	6.1 hp, 20,000 psi discharge,200 psi feed	29,500
Heat Exchanger	7.0 ft^3, Water coolant in at 65° F, T = 25° F	8,500

Gas Storage	Carbon Steel
	Shell r = 36 in
	    l = 60 in
	    t = .484 in
	Ellipsoidal Heads
	    r = 36 in
	    r = 36 in
	    r = 18 in
	    t = .240 in
		6,600

Precooler	NH_3 Plant- .40 ton-day Mixed Tank, 40 gal Heat Exchanger Pump	3,200 3,300 2,400 815
Total Equipment Cost		$ 108,015

Table 4, Continued

2. <u>Crystallizer with Hydraulic Compression</u>

Unit	Specifications	Cost(1985 $)
Crystallizer	302-stainless steel Hydraulyc Intensifier and crystallizer vessel	
	200 psi $r = 101$ cm	
	$l = 200$ cm	
	$t = .693$ cm	
	20,000 psi	
	$r = 10.1$ cm	
	$l = \quad$ cm	
	$t_{HEAD} = 8.1$ cm	
	$t_{SHELL} = 16.2$ cm	
	Piston $r = 101$ cm	
	$l = 10$ cm	
	$r = 10.1$ cm	
	$l = 200$ cm	105,500
	Hydraulic fluid,1600 gal	8,000
Pump	200 psi discharge 22 gpm	4,300
Motor	10 hp	930
Precooler	NH_3 Plant- .52 ton-day	3,200
	Mixed Tank, 40 gal	3,300
	Heat Exchanger	2,400
	Pump	815
Total Equipment Cost		$ 124,945

3. <u>Distillation Column for Comparison</u>

Unit	Specifications	Cost(1985 $)
Condenser	103.8 ft^2	3,500
Reboiler	76.1 ft^2	2,800
Trays	60 sieve trays with downcomers	9,800
Column	100 ft high 18 in between trays	60,300
Total Equipment Cost		$ 76,400

Table 5
Summary of Anual Operating Costs

1. Crystallizer with gas compression

Utility	Ammount	Cost
Refrigeration	.52 ton-day/day	160
Cooling Water	30 gal/cycle	16
Electric (Compressor)	6.1 hp for 10 min/cycle	606
Nitrogen gas	46.0 SCF/cycle	4,540
Total Utilities Cost		$ 5,325

2. Crystallizer with Hydraulic Compression

Utility	Ammount	Cost
Refrigeration	.52 ton-day/day	160
Electric (Pump)	10 hp for 10 min/cycle	999
Total Utilities Cost		$ 1,159

3. Distillation Column

Utility	Ammount	Cost
Steam	914 lb/hr	10,500
Cooling Water	89.4 gpm	2,200
Total Utilities Cost		$ 12,700

V.Discussion

To compare the different processes, there must be several assumptions. First, it must be assumed that this process will be a part of a plant, which produces benzene and further processes a pure benzene product. An example could be ring closure of n-hexane producing cyclohexane. Dehydrogenation of the cyclohexane produces the benzene. Benzene can be further processed to a monomer such as phenol or styrene.

The crude benzene is first purified by a crude distillation to 90% purity. The benzene is then further purified by one of the designed processes. For this reason, land, yards, service facilities, and working capital have already been provided. The focus is economic evaluation of the purification necessary to the plant operation. Installation must be added regardless of the design selected. It will be calculated from a 30% factor of the purchased equipment cost. The percentage factors of purchased equipment cost are referred to as Lange Factors.[30] There are Lange factors to determine expenses such as instrumentation, electrical, and piping. It is assumed that these expenses would be higher for distillation than for high pressure

crystallization. Also the Lange factors reported are for all
chemical processing industries. The factors would not
compensate for the less expensive instrumentation of the
crystallization and for this reason are not included. The
addition of these services would increase each process
proportionally which would probably not be the best cost to
compare.

The present values of the installed equipment and the
present value of 10 years of operating costs are computed and
the sum compared to select the most economical process.

Table 6
Installed Equipment Cost and Operating Expense

Process	Equipment	Installation	Operation		Total
			Annual	10 years	
1	108,015	32,400	5,325	40,380	180,795
2	124,945	37,500	1,159	8,790	171,300
3	76,400	22,900	12,700	96,900	196,200
4	40,900	12,300	2,400	18,200	73,400

Process 1, Crystallizer with gas pressurization
Process 2, Crystallizer with hydraulic pressurization
Process 3, Standard distillation column
Process 4, Proabd refiner [6]

The total cost for the hydraulically pressurized
process is the lowest. This would probably be the process
chosen. There may be other factors involved beside the cost.
The plant may use many standard pumps and may not use
compressors. This might influence the decision to go with

the more expensive compressor design. There may also be reliablility data on compressors and piston systems that may make the use of one more attractive. The development of a pilot plant for each of the crystallizer processes could answer many of the questions about reliablility.

Table 7
Separation Costs of Crystallizer and Distillation Designs

Process	Total Installed Cost	Feed Composition	Separation Cost ($/Kg)
1	140,400	90%	.00533
2	162,500	90%	.00116
3	99,300	90%	.01270
4	205,500 (53,200)	98%	.00240

Process 1, Crystallizer with gas pressurization
Process 2, Crystallizer with hydraulic pressurization
Process 3, Standard distillation column
Process 4, Proabd refiner [6]

Table 7 shows the designed processes and a refrigeration type industrial process.[6] The Proabd refiner as discussed earlier operates on batch cycle and uses programmed freezing and warming to separate the feed. As shown in Table 7, the comparison of costs for separation clearly show that the high pressure processes have a sizable economic advantage over distillation and crystallization by

refrigeration. The refrigeration process was reported for economic comparison for complete plants. The installed cost was estimated with Lange factors and is reported in parenthesis in the Table 7. The feed composition is also important. The Proabd refiner is the least costly but, is fed a 98% pure mixture. The effect of raising the feed impurity concentration would greatly increase the capital investment and raise the operating costs. The crystallizer would need a larger design to freeze the increased mother liquor and this would also force the operating cost higher, probably higher than the high pressure processes.

Before implementation of the high pressure crystallization process, several other questions need to be studied. The first is to gather data on specific systems of interest. A multipurpose pilot plant should be developed to study various systems and techniques of operation and control. If the gas pressurization design is selected, there is an excellent chance of a patent on the process. The hydraulic process may also be eligible for a patent. Kobe Steel does not have United States patents on the process they have designed so it may be possible to alter or improve on their design. The cycle time assumed in the crystallizer design was 30 minutes. The Kobe Steel research concluded that cycle times could be as low as 2 minutes. They report

the equilibrium to be established in as low as 10 seconds.
If the cycle time were reduced, the present design could be
reduced in size and much less costly to construct. The
construction of a pilot plant could confirm this as well as
determine where various separation processes could be
improved upon.

VI. Conclusions

The results of this study of high pressure crystallization can be summarized as follows:

1. The hydraulic compression crystallization process is the least expensive of the processes study. It is capable of separating the feed benzene stream for a capital cost of $ 162,445 and operate for $ 1,159/year. This is the lowest of the processes, Table 4.

2. The hydraulic pressurization may have some patent problems. The Kobe Steel research group has a process which is similar. They have an operating pilot plant and several patents granted and pending.

3. The gas pressurization process is close to competitiveness with the hydraulic process. It is lower in capital cost but, is higher in operating costs. The operating costs could be reduced by using a diaphragm to allow compression by filtered air instead of nitrogen. Reduction of operating costs could also be realized from a more complete recovery of the nitrogen.

4. The use of distillation for this separation is not recommended. The high cost required to operate the process would be a great deal more expensive for the expected equipment service life.

VII.Recommendations

The future of this project should proceed as follows:

1. Prior to implementation of the high pressure crystallization process data on specific systems should be gathered. A multipurpose pilot plant should be built to study these systems and to develop techniques of operation and control. If the gas pressurization design is selected, there is an excellent chance of a patent on the process. The hydraulic process may also be unique enough for a patent. Kobe Steel does not have United States patents on the process they have designed so it may be possible to alter or improve on their design. The cycle time assumed in the crystallizer design was 30 minutes. The Kobe Steel research concluded that cycle times could be as low as 2 minutes. They report the equilibrium to be established in as low as 10 seconds. If the cycle time were reduced the present design could be much less costly to construct. The construction of a pilot plant could confirm this as well as determine where various separation processes could be improved upon.

2. Other improvements could include an optimum switch from distillation to crystallization. The crystallizer will produce the high purity at low cost but, only when feed a high purity material. There could be an optimum concentration to switch separation techniques from

distillation to crystallization. In the case of this study, the optimum is probably at a feed of higher than 90% pure. With a more pure feed the crystallizer could be designed at a lower pressure and smaller cycle capacity. The pressure reduction would result from good productivity at a lower ultimate mother liquor concentration. The crystallizer capacity may also be reduced because with a more pure feed the equilibrium in the system will be achieved more quickly. The result of these factors would allow a less expensive design for the crystallizer as well as lower operating costs due to the reduction of mother liquor.

This work has possibly led to a patentable process. The application for patent has begun. If granted it would be well advised to fund a pilot plant which could answer many questions about process parameters (i.e. cycle time, feed concentrations, product purity) having influence on the overall cost. The pilot plant could be used to gather data on many systems and to determine optimal concentrations to switch from distillation to crystallization. The pilot plant could also answer some question about the reliability of the equipment used in the crystallization.

VIII.BIBLIOGRAPHY

1.   American Society of Mechanical Engineers.
      Section VIII, Rules for Construction
      of Pressure Vessels, Division 1.
      New York: United Engineering Center,
      1983.

2.   Angus, S., de Reuck, K.M., and Armstrong, B.
      International Thermodynamic Tables of
      the Fluid State- 6 Nitrogen. New York:
      Pergamon Press, 1977.

3.   Aston, J.G., and Mastrangelo, S.V.R. "Improved
      fractional apparatus." Analytical
      Chemistry, April 1954, 26(4), p. 764-
      766.

4.   Bowden, W.W. Classical Thermodynamics for
      Engineers. Terre Haute, Indiana: Rose-
      Hulman Institute of Technology, 1981.

5.   Bridgman, P.W. Proceedings of the American
      Academy of Arts and Sciences, 1949,
      77, p. 129.

6.   Chaty, J.C., and Wilcox, W.R. "Economics of
      fractional solidification." In M. Zief
      and W.R. Wilcox (Eds.) Fractional
      Solidification (Vol. 1). New York:
      Marcel Dekker, Inc., 1967.

7.   Clark, F.D., and Terni, S.P. "Thick walled
      pressure vessels." In Modern Cost
      Engineering: Methods and Data. New
      York: Mc Graw-Hill Publishing Co.,
      1979, p. 339-342.

8.   Denbigh, K. The Principles of Chemical
      Equilibrium (4th ed.). New York:
      Cambridge University Press, 1983,
      p. 197-200.

9.   Gelrig, M., and Lentz, H. "PVT data for benzene
      in the range 5 to 300 MPa and 323 to
      683 K." Journal of Chemical
      Thermodynamics, 9, 1977, p. 445-450.

10.   Gel'perin, N.I., Laphenkov, G.I., Nosov, G.A., and Taran, A.L. "Investigation of the process of crystallization of a melt on surfaces with the aid of resistance networks." International Chemical Engineering, 18(11), January 1978, p. 115-118.

11.   Gerard, W. Solubility of Gases and Liquids: A Graphical Approach. New York: Plenum Press, 1976, p. 254.

12.   Glassgow, A.R., Jr., and Ross, G. "Purification of substances by a process of freezing and fractional melting under equilibrium conditions." Journal of Research of the National Bureau of Standards, September 1956, (Research Paper 2703), 57(3), p. 137-142.

13.   Gouw, T.H. "Programed-temperature normal freezing." Separation Science, 1967, 2(4), p. 431-437.

14.   Guthrie, K.M. "Estimating the cost of high pressure equipment." In H. Popper (Ed.) Modern Cost Estimating Techniques. New York: Mc Graw-Hill Publishing Co., 1970, p. 147-150.

15.   Hoffman, H.C. "Pressure vessel primer." Machine Design, 52(23), 9 October 1980, p. 168-171.

16.   "Hydrocarbon processing industry boxscore." Hydrocarbon Processing, Section 2, February 1984, p. 14-43.

17.   King, C.J. Separation Processes. New York: Mc Graw-Hill Publishing Co., 1971.

18.   Kobe Steel, LTD., New Materials Division. "Technical presentation on high pressure crystallization process."

19.   Leyerrle, J.D. "Supply/demand of benzene in 1990." Chemical Engineering Progress, 80(5), 5 May 1984, p. 13-16.

20.   Molinari, J.G.D. "The Proabd refiner." In M. Zief and W.R. Wilcox (Eds.) Fractional Solidification (Vol. 1). New York: Marcel Dekker, Inc., 1967.

21.   Molinari, J.G.D. "The Newton-Chambers process."
In M. Zief and W.R. Wilcox (Eds.)
Fractional Solidification (Vol. 1).
New York: Marcel Dekker, Inc., 1967.

22   Moritoki, M. "A method of fractional
crystallization under high pressure."
International Chemical Engineering,
20(3), July 1980, p. 394-401.

23   Moritoki, M., and Fujikawa, T. "Liquid-solid
phase diagram of p- and m-cresol
mixtures under pressure." In S.J. Janic
and E.J. de Jong (Eds.), Industrial
Crystallization 84. Amsterdam,
Netherlands: Elsevier Science, 1984,
p. 369-372.

24   Moritoki, M. "Crystallization and sweating of
p-cresol by application of high
pressure." In S.J. Janic and E.J.
de Jong (Eds.), Industrial
Crystallization 84. Amsterdam,
Netherlands: Elsevier Science, 1984,
p. 373-376.

25   Moritoki, M., Kitagagawa, K., Onoe, K., and
Kaneko, K. " A pilot study of p-cresol
crystallization by adiabatic
application of high pressure." In S.J.
Janic and E.J. de Jong (Eds.),
Industrial Crystallization 84.
Amsterdam, Netherlands: Elsevier
Science, 1984, p. 377-380.

26   Moritoki, M." Phase diagram sent in personal
correspondence." 19 August 1985.

27   Mulet, A., and Corripio, A.B. "Estimate costs
of pressure vessels via correlations."
Chemical Engineering (New York),
88(20), 5 October 1981, p. 145-
146,148,150.

28   Mullin, J.W. Crystallization(2nd ed.).
Cleveland, Ohio: CRC Press Inc., 1972.

29   Osugi, J., Shimizu, K., Yasunami, K., Moritoki,
M., and Onodera, A. "Liquid-solid
transition at high pressure III."
Review of Physical Chemistry of
Japan, 38(2), 1968, p. 90.

30   Peters, M.S.,and Timmerhaus, K.D. Plant Design
      and Economics for Chemical Engineers
      (3rd ed.). New York: Mc Graw-Hill
      Publishing Co., 1980.

31   Richman, D., Wynne, E.A., and Rosi, F.D.
      "Progressive freezing." In M. Zief and
      W.R. Wilcox (Eds.) Fractional
      Solidification (Vol. 1). New York:
      Marcel Dekker, Inc., 1967.

32   Seader, J.D., Seider, W.D., and Pauls, A.C.
      Flowtran Simulation- An Introduction
      (2nd ed.). Cambridge, Massachusetts:
      CACHE, 1977.

33   Taslimi, M. "The PVT data of 20 organic liquids
      and their relationship to molecular
      structure." Doctoral Thesis,
      Department of Mechanical Engineering at
      Technical University of Hannover, 1969.

34   Weast, R.C., (Ed.). Handbook of Chemistry and
      Physics (59th ed.). Boca Raton,
      Florida: CRC Press, Inc., 1979.

35   Wilcox, W.R., and Zief, M.(Eds.). Fractional
      Solidification (Vol. 1). New York:
      Marcel Dekker, Inc., 1967.

36   Wilcox, W.R. "Introduction." In M. Zief and
      W.R. Wilcox (Eds.) Fractional
      Solidification (Vol. 1). New York:
      Marcel Dekker,Inc., 1967.

37   Wolten, G.M., and Wilcox, W.R. "Phase
      diagrams." In M. Zief and W.R. Wilcox
      (Eds.) Fractional Solidification
      (Vol. 1). New York: Marcel Dekker,
      Inc., 1967.

APPENDIX

```
c      This is a fortran subroutine which is
c      designed to run with Flowtran.  It is
c      block modeling a batch high pressure
c      crystallizer. The block list is 8 characters
c      long.
c      1 Block
c      2 Name
c      3 BHPC
c      4 Feed
c      5 Gas in
c      6 product
c      7 Mother liquor
c      8 Gas out
c      The parameter list has 7 pieces of data
c      to input.
c      1 Temperature
c      2 Cycle time
c      On Material of Construction
c      3 Maximun allowable pressure(atm)
c      4 Density (g/cc)
c      5 Joint eficiency
c      6 Cost/unit weight ($/lb)
c      7 Radius of vessel (in)
c      The retention vector contains:
c      1 Operating pressure
c      2 Crystallizer volume
c      specific volumes of:
c      3 Benzene liqud
c      4 Benzene solid
c      5 Cyclohexane liquid
c      6 Shell thickness
c      7 Head thickness
c      8 Shell wieght
c      9 Head weight
c      10 Crystallizer cost
c      11 Minimum work/hour
c      12 Nitrogen in solutuion
c      13 Nitrogen in space
c      14 Concentration in feed
c      15 Concentration in product
c      The units throughout the program are uniform.
c      Thicknesses or lengths are in inches.
c      Weights are in pounds.
c      Density is measured in g/cc
c      Specific volumes are in cc/g.
c      Pressure is in atm,except when some equations
c      cf state are used. The units are stated and
c      converted back after calculation.
c      Time is in hours.
c      All flow rates are in pound moles.
c
       SUBROUTINE BHPC(F1,G1,P1,W1,G2,PAR,RET)
       DIMENSION F1(31),P1(31),W1(31),G1(31),G2(31),PAR(31),RET(31)
       COMMON/B/ FR(31),PR(31),AMLR(31),GI(31),GO(31)
       COMMON/C/ P,VCPO,VCP,VOBZ,VLBZ,VSBZ,VOC6,VLC6,TSH,WSH,POI,PRN
       COMMON/D/ TH,WH,WORRLB,CRCOST,WORKCY,WN2SOL,WN2SPC,CO,CS,CML
       COMMON/E/ T,CYCTM,S,ROU,E,WCOST,R
       DO 111 I=1,31
       FR(I)= F1(I)
       PR(I)= P1(I)
       AMLR(I)= W1(I)
       GI(I)= G1(I)
```

MICROCOPY   CHART

```
        GO(I)=G2(I)
111     CONTINUE
        NSTEP= 30
        IF(ROUT.EQ.2)GO TO 50
        CYCTM= PAR(3)
        T= PAR(1)
        R= PAR(5)
        S= PAR(7)
        E= PAR(9)
        CML = PAR(15)
        ROU=PAR(11)
        WCOST= PAR(13)
        CALL PRESS
        CALL SEP
        CALL COMPS
        CALL CRYVOL
        CALL CRYSZ
        CALL WORK
        CALL N2REQ
50      WRITE(6,100)
        WRITE(6,101)
        WRITE(6,102) FR(20),PR(20),AMLR(20)
        WRITE(6,103) GI(20),GO(20)
        WRITE(6,104) T
        WRITE(6,105) CYCTM
        WRITE(6,106) S
        WRITE(6,107) ROU
        WRITE(6,108) E
        WRITE(6,109) WCOST
        WRITE(6,110) R
        WRITE(6,100)
        WRITE(6,101)
        WRITE(6,120) P
        WRITE(6,121) VCPO
        WRITE(6,135)
        WRITE(6,122) VOBZ,VLBZ
        WRITE(6,123) VSBZ
        WRITE(6,136)
        WRITE(6,124) VOC6,VLC6
        WRITE(6,125) TSW,WSW
        WRITE(6,126) TW,WW
        WRITE(6,127) CRCOST
        WRITE(6,128) WORKCY
        WRITE(6,150) WORKLB
        WRITE(6,137)
        WRITE(6,129) WN2SOL,WN2SPC
        WRITE(6,138)
        WRITE(6,130) CO,CS,CML
100     FORMAT('1',15X,'HIGH PRESSURE CRYSTALLIZER')
101     FORMAT(16X,'BLOCK - BHPC',5X,'NAME - CRYS')
102     FORMAT(16X,'FEED = ',A4,'PRODUCT = ',A4,'MOTHER LIQUOR = ',A4)
103     FORMAT(16X,'NITROGEN GAS IN = ',A4,'NITROGEN GAS OUT = ',A4)
104     FORMAT(16X,'OPERATING TEMPERATURE = ',F6.2,'DEG K')
105     FORMAT(16X,'CYCLE TIME = ',F8.4,'HOURS')
106     FORMAT(16X,'MAXIMUM ALLOWABLE PRESSURE = ',F10.4,'ATM')
107     FORMAT(16X,'MATERIAL DENSITY = ',F8.5,'g/cc')
108     FORMAT(16X,'JOINT EFFIENCY = ',F8.5)
109     FORMAT(16X,'COST PER WEIGHT = ',F8.5,'S/LB')
110     FORMAT(16X,'RADIUS OF VESSEL = ',F8.5,'IN')
120     FORMAT(16X,'OPERATING PRESSURE = ',F8.3,'ATM')
121     FORMAT(16X,'CRYSTALLIZER VOLUME = ',F8.3,'L')
122     FORMAT(16X,'LIQUID AT PO',F8.5,10X,'LIQUID AT P',F8.5)
```

```
123     FORMAT(16X,'SOLID AT P',F8.5)
124     FORMAT(16X,'LIQUID AT P0 = ',F8.5,10X,'LIQUID AT P = ',F8.5)
125     FORMAT(16X,'SHELL THICKNESS[IN]=',F8.5,'SHELL MASS[LB]=',F14.2)
126     FORMAT(16X,'HEAD THICKNESS[IN]=',F8.5,'HEAD MASS[LB]=',F14.2)
127     FORMAT(16X,'CRYSTALLIZER COST = $',F10.2)
128     FORMAT(16X,'MINIMUM WORK PER HOUR = ',F12.3,'BTU')
150     FORMAT(16X,'MINIMUM WORK PER POUND PRODUCT',F8.3)
129     FORMAT(16X,'IN SOLUTION = ',F8.2,'IN GAS PHASE = ',F8.2)
130     FORMAT(16X,'IN = ',F8.6,'PRODUCT = ',F8.6,'MOTHER LIQUOR = ',F8.6)
135     FORMAT(16X,'SPECIFIC VOLUME OF BENZENE [cc/g]')
136     FORMAT(16X,'SPECIFIC VOLUME OF N-HEXANE [cc/g]')
137     FORMAT(16X,'NITROGEN DISTRIBUTION [LB]')
138     FORMAT(16X,'CONCENTRATION OF IMPURITY (N-HEXANE)')
        END
C
C
C
C
        SUBROUTINE PRESS
C
C       This subroutine calculates the transition
C       pressure for benzene given a temperature
C       and uses as a point to define a line
C       knowing the slope of the phase diagram.
C       The line is then used to determine the
C       highest pressure needed to provide the
C       given outlet concentration.
C       FROM P.94 REF.55
C       P-Po= a[(T/To)**c-1]
C       and
C       P = -3567 Cout + I
C       Cout = outlet concentration
C       POI = intercept determined from pressure (X benxene = 1.0)
C       [P]= bars
C       [Po]= bars
C       a= 3.6 E3 bars
C       c= 2.60
C       To= normal bioling point at Po
C
C
        COMMON/C/ P,VCP0,VCP,V0BZ,VLBZ,VSBZ,V0C6,VLC6,TSH,WSH,POI,PRN
        COMMON/D/ TH,WH,WORKLB,CRCOST,WORKCY,WN2SOL,WN2SPC,C0,C',CML
        COMMON/E/ T,CYCTM,S,ROU,E,WCOST,R
        COMMON/B/ FR(31),PR(31),AMLR(31),GI(31),GO(31)
        A=3600
        C=2.60
        T0=278.8
        P0=1.01325
        TEMP= T/T0
        PA=1+A*((TEMP**C)-1)
        PP= PA/1.01325
        POI= -2430 - PP
        P = -2430*CML - POI
        RETURN
        END
C
C
C
C
        SUBROUTINE SEP
C
C       This subroutine determines the seperation based
```

```
c          on data from M. Moritoki, "A method of fractional
c          crystillation under high pressure," International
c          Chemical Engineering, Vol.20, No.3, p.397.
c          The Cs/Co vs. pressure curve was approximated
c          by a straight line over the 900 to 600 kg/cm2
c          range:
c               Cs/Co = .13181 - 1.1748E-4 (P).
c
c
          COMMON/C/ P,VCP0,VCP,VOBZ,VLBZ,VSBZ,VOC6,VLC6,TSH,WSH,POI,PRN
          COMMON/D/ TH,WH,WORKLB,CRCOST,WORRCY,WN2SOL,WN2SPC,CO,CS,CML
          COMMON/E/ T,CYCTM,S,ROU,E,WCOST,R
          COMMON/B/ FR(31),PR(31),AMLR(31),GI(31),GO(31)
          CO=FR(3)*84/(FR(1)*78+FR(3)*84)
          IF(P.GE.1000)GO TO 210
          CSCO= .13181 - ((1.1748E-4)*P)
210       CSCO = .017
          CS=CSCO*CO
          RETURN
          END
c
c
c
c

          SUBROUTINE COMPS

c          This subroutine assigns the flow rates of the prpduct
c          and by product streams by using mass balances.
c

          COMMON/C/ P,VCP0,VCP,VOBZ,VLBZ,VSBZ,VOC6,VLC6,TSH,WSH,POI,PRN
          COMMON/D/ TH,WH,WORKLB,CRCOST,WORRCY,WN2SOL,WN2SPC,CO,CS,CML
          COMMON/E/ T,CYCTM,S,ROU,E,WCOST,R
          COMMON/B/ FR(31),PR(31),AMLR(31),GI(31),GO(31)
          PROP = ((FR(1)+FR(3))*(1-CML -PR(3))/((1-CML)-CS)
          PR(1) = (1-CS)*PROP
          PR(3) = CS*PROP
          PRINT*, 'PROP',PROP
          AMLR(1) = FR(1)-PR(1)
          AMLR(3) = FR(3)-PR(3)
          RETURN
          END
c
c
c
c

          SUBROUTINE CRYVOL

c          This subroutine calculates the crystillizer
c          volume given an operating pressure and the
c          physical property data on the system components.
c          The volume is calculated using the assumption that
c          cyclohexane and benzene are independent in making up the
c          volume.
c
c

          COMMON/C/ P,VCP0,VCP,VOBZ,VLBZ,VSBZ,VOC6,VLC6,TSH,WSH,POI,PRN
          COMMON/D/ TH,WH,WORKLB,CRCOST,WORRCY,WN2SOL,WN2SPC,CO,CS,CML
          COMMON/E/ T,CYCTM,S,ROU,E,WCOST,R
          COMMON/B/ FR(31),PR(31),AMLR(31),GI(31),GO(31)
          PO=1
          VOBZ= 1.138
```

```
                        VOC6= 1.284
                        AMSC6 = CYCTM*FR(3)*84
                        AMSBZ = CYCTM*FR(1)*78
                        CALL ESBZP
                        CALL ESC6P
                        VCP0= (AMSBZ*VOBZ+AMSC6*VOC6)*.454
                        VCP = (VLBZ*AMLR(1)*78+VSBZ*FR(1)*78+VLC6*FR(3)*84)*CYCTM*.454
                        RETURN
                        END
       c
       c
       c
       c

                        SUBROUTINE ESBZP

       c
       c        This subroutine calculates the volume of benzene
       c        given a pressure and temperature.  It uses published data from
       c        Manred Gehrig and Harro Lentz in Journal of Chemical
       c        Thermodynamics, 1977, 9, p.455-450, and P.W. Bridgman
       c        in proceedings of the American Academy of Arts and Sciences,
       c        1949, 77, p.129-146.  Given a pressure above the transition
       c        pressure the program assumes 85% solid and 15% liquid
       c        because of time limitations ( equilibrium is not
       =        economical to achieve ) and impurities present in the
       c        solution.  The equations used are:
       c
       c        ( Vo-V )/V = Aln { ( B+P )/( B+Po ) }
       c        [B]= MPa
       c        [P]= MPa
       c        p. 449 Gehrig and Lentz
       =
       c        At freezing 25 oC and 680 kg/cm2
       c        DeltaV/ V= .0634 and .1596
       c        p. 140 Bridgman
       c
       c
                        COMMON/C/ P,VCP0,VCP,VOBZ,VLBZ,VSBZ,VOC6,VLC6,TSH,WSH,POI,PRN
                        COMMON/D/ TH,WH,WORRLB.CRCOST,WORKCY,WN2SOL,WN2SPC,CO,CS,CML
                        COMMON/E/ T,CYCTM,S,ROU,E,WCOST,R
                        COMMON/B/ FR(31),FR(31),AMLR(31),GI(31),GO(31)
                        VO= 1.138
                        P0= .101325
                        A= .1845
                        B= 984.6-2.446*T
                        IF (P.LE.680) GO TO 50
                        PM=.101325*P
                        FX= (B+PM)/(B+P0)
                        DD=LOG(FX)
                        VLBZ= V0/(1+A*DD)
                        VSBZ= .8404*V0
                        RETURN
       50               PRINT*, 'ERROR "NO SOLID EXISTS"'
                        RETURN
                        END
       c
       c
       c
       c

                        SUBROUTINE ESC6P

       c
       c        This subroutine calculates the volume of cyclohexane
       c        given a pressure and temperature.  It uses published
```

```
c          data from Mohsen Taslimi a doctorate disertation 1969.
c          The equation  used is:
c
c          ( Vo-V)/ Vo= C log10 ( B+P )/ B
c          [P]= kp/cm2
c          [B]= kp/cm2
c          p. 41
c
c
           COMMON/C/ P,VCP0,VCP,VOBZ,VLBZ,VSBZ,VOC6,VLC6,TSH,WSH,POI,PRN
           COMMON/D/ TH,WH,WORKLB,CRCOST,WORKCY,WN2SOL,WN2SPC,CO,CS,CHL
           COMMON/E/ T,CYCTM,S,ROU,E,WCOST,R
           COMMON/B/ FR(31),PR(31),AHLR(31),GI(31),GO(31)
           B= 3C02 - 6.87*T
           C= .2272
           VO= 1.284
           PH= 1.03327*P
           A=(B+PH)/B
           PRINT*,A
           VLC6= VO*(1-C*LOG10(A))
           RETURN
           END
c
c
c
c
           SUBROUTINE CRYSZ
c
c          This subroutine deteermines minimum shell and
c          head thickness of the pressure vessel.  The equations
c          used are ASME standards and are taken from Max S.
c          Peters and Klaus D. Timmerhaus,  Plant
c          Design and Economics for Chemical Engineers,
c          3rd. Ed., p.570-571.
c
c          For cylindrical shell;
c
c          t = r (Z**.5 -1)
c          Z = (SE + P)/(SE - P)
c
c          For ellipsoidal heads;
c
c          t = 2 Pr/(2SE - .2P)
c
c          t = minimum wall thickness [in]
c          S = maximum allowable working stress [atm]
c          E = effiency of joints is a fraction
c          P = maximum internal pressure [psi]
c          C = corrosion allowance [in]
c
c
           COMMON/C/ P,VCP0,VCP,VOBZ,VLBZ,VSBZ,VOC6,VLC6,TSH,WSH,POI,PRN
           COMMON/D/ TH,WH,WORKLB,CRCOST,WORKCY,WN2SOL,WN2SPC,CO,CS,CHL
           COMMON/E/ T,CYCTM,S,ROU,E,WCOST,R
           COMMON/B/ FR(31),PR(31),AHLR(31),GI(31),GO(31)
           PI= 3.14159
           Z=((S*E+P)/((S*E)-P)
           TSH= R*((Z**.5)-1)
           TH=P*R*2/(2*S*E-.2*P)
           VC = VCPC-(4/3)*.01639*PI*(R**3)
           ALSH= .3937*(VC*155)/(PI*(R**2))
           PRINT*,'Z L ',Z,ALSH,VC
```

```
      VSH= ((TSH+R)**2-R**2)*PI*ALSH
      VH= (4/3)*PI*((TH+R/2)*(TH+R)**2-.5*R**3)
      WSH= VSH*ROU*16.387/454
      WH= VH*ROU*16.387/454
      WT= WSH+WH
      CRCOST= WT*WCOST
      RETURN
      END
C
C
C
C
      SUBROUTINE WORK
C
C     In this subroutine the reversable work is calculated
C     for each of the system components.  It is assumed that the
C     work is independent of composition.  The equations of
C     state used above for determining the specific volume
C     of the liquids are again used.  The reversable work,
C     the intergral of PdV, is calculated by the Trapizoidal
C     rule over several steps, NSTEP.
C
C
      COMMON/C/ P,VCP0,VCP,VOBZ,VLBZ,VSBZ,VOC6,VLC6,TSH,WSH,POI,PRN
      COMMON/D/ TH,WH,WORKLB,CRCOST,WORKCY,WN2SOL,WN2SPC,CO,CS,CML
      COMMON/E/ T,CYCTM,S,ROU,E,WCOST,R
      COMMON/B/ PR(31),PR(31),AMLR(31),GI(31),GO(31)
      A=.1865
      C=.2272
      NSTEP=30
      VOBZ= 1.138
      VOC6= 1.284
      DVC6= (VOC6-VLC6)/NSTEP
      BBZ= 984.6-2.446*T
      BC6= 3002 - 6.87*T
      P0=.101325
      DO 10,I=0,NSTEP
      VC6= VOC6 - I*DVC6
      CC= (VOC6-VC6)/(VOC6*C)
      PC6NEW= BC6*((10**CC)-1)*1.03327
      PC6AVE= (PC6NEW + PC6OLD)/2
      WORK2= WORK2 +  PC6AVE*DVC6
      PC6OLD = PC6NEW
   10 CONTINUE
      P0=1.0
      DPR=0
      DPS=0
      DP= (P-P0)/NSTEP
      POLD=P0
      VO=VOBZ
      VSO=.9751
      DO 11, J=1,NSTEP
      PNEW= P0+ J*DP
      PAVE= (PNEW+POLD)/2
      IF(PAVE.LE.1000) GOTO 12
      CR= (PAVE+POI) /(-2430)
      PRN= .5*((PR(1)*78+PR(3)*84)*(1-CR)-PR(3)*84)/((1-CR)-CS)
      DPR= PRN-PRO
      VSN= VOBZ-((PAVE+15520)/101500)
      DVS = VSO-VSN
      IF(DVS.LE.0)DVS=0
   12 AA= (BBZ+PNEW)/(BBZ+P0)
```

```
       VN= VOBZ/(1+A*LOG(AA))
       DV= -VN+VO
       WORKL= DV*PAVE*(FR(1)*78-PRN)
       WORKT= DPR*PAVE*.0962
       WORKS= PRN*PAVE*DVS
       WORK1= WORK1-WORKL+WORKT+WORKS
       VO=VN
       PRO=PRN
       VSO=VSN
       POLD=PNEW
       PRINT*,'P AVE','WORK 1','PRODUCT RATE'
       PRINT*,PAVE,WORK1,PRN
11     CONTINUE
       WORK4 = WORK1 +WORK2*84*FR(3)
       WORK4 = WORK4*.454*.0961118
       WORKCY= WORK4
       WORKLB= WORKCY/(PRN*2.2)
       RETURN
       END
C
C
C
C
C
       SUBROUTINE N2REQ
C
C      This subroutine calculates the nitrogen required
C      by the crystallizer for the benzene-n-cyclohexane system.
C      The equation of state used is the real gas law with
C      the compressibility factors found by estimating data
C      to a straight line between 200 and 1000 atm.  The data
C      was found in M. Moore, Physical Chemistry, 4th Ed.(1972),
C      p. 20. The equqtion is; Z = 1.3525E-3 P + .75100. There
C      is also the problem of the nitrogen disolving in the
C      solution. This quanity is estimated by a know mole
C      fraction of nitrogen in benzene at 25 oC and 120 atm.
C
C
       COMMON/C/ P,VCPO,VCP,VOBZ,VLBZ,VSBZ,VOC6,VLC6,TSH,WSH,POI,PRN
       COMMON/D/ TH,WH,WORKLB,CRCOST,WORKCY,WN2SOL,WN2SPC,CO,CS,CHL
       COMMON/E/ T,CYCTM,S,ROU,E,WCOST,R
       COMMON/B/ FR(31),PR(31),AMLR(31),GI(31),GO(31)
       SCL = .02050
       VSPC = VCPO - VCP
       WN2SPC = 61.6*P*VSPC/((1.3525E-3*P+.38)*82.05*T)
       DDD= FR(1)*78+FR(3)*84-PRN
       WN2SOL = (DDD/(1-SOL))*SOL
       WN2 = (WN2SOL + WN2SPC)/CYCTM
       GO(5)=WN2/28.02
       GI(5)=WN2/28.02
       RETURN
       END
```

END
FILMED

5-86

DTIC